

ULTRABLADE PRO SURFACE MOUNT EXIT



Surface Mounted Architectural Blade Exit

The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium surface mounted exit.

With a reduced reflection, halo effect on the diffuser with a decal that is scratch and fingerprint resistant it is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.

Applications

- | | |
|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
|  Office Buildings |  Shopping Centres |
|  Galleries |  Retail Outlets |
|  Theatres |  Apartments |

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.4W to 1.8W standby power consumption
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available



ULTRABLADE PRO SURFACE MOUNT EXIT

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard	EUBPRO-SM-LI	CUBPRO-SM	LUBPRO-SM
	Clevertest Plus System Compatible	No	Yes	
	DALI	-	CUBPRO-SM-DALI	LUBPRO-SM-DALI
	Zoneworks® XT Hive	-	CUBPRO-SM-HV	LUBPRO-SM-HV
	Theatre Version	No	CUBPRO-SM-TH	LUBPRO-SM-TH
Carton Quantity	5			
Weight - single (carton)	1.0kg (5kg)			
Dimensions (L x W x H)	317mm x 8.7mm x 157mm - Blade Assembly 360mm x 47mm x 72mm - Base			
Directional Options	All Directional Inserts Included (Excluding theatre versions)			
Directional Options (Theatre Only)	-	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CUBPRO-SM-TH-DS-RR		

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby / Max)	1.8W / 2.8W	1.4W / 3.7W	
Lamp(s)	50,000 Hour LED	100,000 Hour LED	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 1100mAh		3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body / Diffuser	PC-ABS / PC
Viewing Distance	24m
Mounting Type	Single and Double Sided
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS	EL	LP	L10
Battery	1560200	1550105	1530030
Lamp Bar	8002179	8002389	8002389
DALI Node	-	8003060	8003060
Zoneworks® XT Hive Node	-	8003190	8003190
Diffuser	2310250	2310250	2310250


CLASSIFICATION	EL	LP	L10
Co	E5	E6.3	E6.3
C90	E5	E6.3	E6.3

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E5	6.6	7	7.4	7.7	7.9	8.1	8.2	8.2	8
E6.3	6.9	7.4	7.9	8.2	8.5	8.8	9.1	9.2	9.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

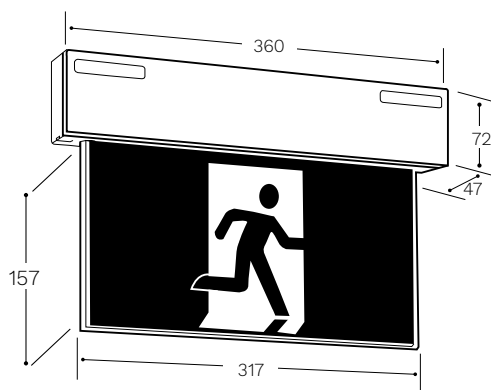

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice. CT-BRO-ANZ-ULTRABLADEPRO-SM-EX-001

