

WEATHERPROOF UNIVERSAL EXIT



Weatherproof and Easy to Install

The Weatherproof Universal Exit offers a cost effective solution for applications that require an IP66/67 rated exit. Mounting can be either wall or ceiling with the option of single or double sided decals.


Built with a polycarbonate clear cover and nylon base that is tested to an impact rating of IK10 it is easy to see why it is a popular choice for weatherproof applications.

Applications

- | | |
|--|--|
|  Schools |  Public Amenities |
|  Factories |  Stadiums |
|  Car Parks |  Warehouses |

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall or ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

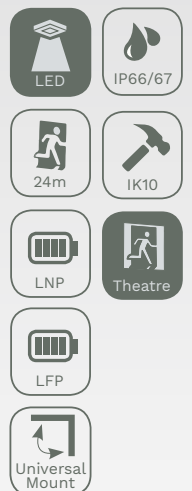

WEATHERPROOF UNIVERSAL EXIT

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard / Self-Test Capable	EWELED-LI	CWELED	LWELED
	Clevertest Plus System Compatible	No	Yes	Yes
	DALI	-	CWELED-DALI	LWELED-DALI
	Zoneworks® XT Hive	-	CWELED-HV	LWELED-HV
	Classic Version	-	-	LCWELED-R
Carton Quantity	4			
Weight - single (carton)	2.8kg (11.2kg)			
Dimensions (L x W x H)	410mm x 100mm x 272mm			
Directional Options	All Directional Inserts Included (Excluding theatre versions)			

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby/Max)	1.1W / 2.0W	2.7W / 5.1W	
Lamp(s)	50,000 Hours LEDs	100,000 Hours LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 600mAh	3.2V / 1500mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V(50Hz)
Construction	Cleverfit Inside Glass Reinforced Nylon Base and PC Cover
Viewing Distance	24m
Mounting Type	Wall and Ceiling (Single and Double Sided)
Operating Temperature	0°C to 40°C
Ingress Protection Rating (IP)	IP66/67
Impact Rating (IK)	IK10

SPARE PARTS	EL	LP	L10
Battery	1550195	1550190	1530090
Lamp Bar	8002900	8002120	8002430
DALI Node	-	8003060	8003060
Zoneworks® XT Hive Node	-	8003190	8003190
Diffuser	2710140	2710140	2710140

ACCESSORIES	EL	LP	L10
Cantilever Bracket	CLVBRT-CF-WP	CLVBRT-CF-WP	CLVBRT-CF-WP


CLASSIFICATION	EL	LP	L10
Co	E2	E2	E2
C90	E1.6	E2	E2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	0.0	0.0
E2	5	5.2	5.2	5.2	0.0	0.0	0.0	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

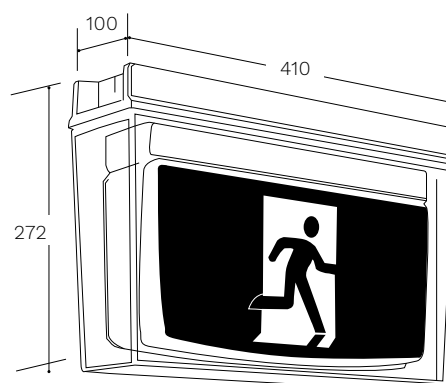

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice. CT-BRO-ANZ-WEATHERPROOF-UNI-EX-001

