

Specifications

- Standard Length 3.0 metres.
- Cable laying depth 50 mm

Surface Finish Available Finish

Pre Galvanised to AS1397
Hot Dip Galvanised to AS/NZ 4680:2006

Note

- The Burndy Fire Rated Systems requires no on-site welding to cut and rejoin.
- Powder coating and special finishes on request against firm orders only and are non returnable.

The Fire Rated System complies with **Australian and New Zealand Standard AS/NZ 3013:2005 Classification WS5X**. It is designed and tested to achieve 2 hour fire rating at 1050 deg. Centigrade.


Fire rating only applies when used as a complete FR7BCM arrangement.

Uniform load rating of 7 kg per metre.

Maximum support span of 1.0 metres.

| Ordering Code | Height mm | Width mm |
|---------------|-----------|----------|
| BCM150PG | 50 | 150 |
| BCM300PG | 50 | 300 |

Kit Ordering Code FR7BCM<width>

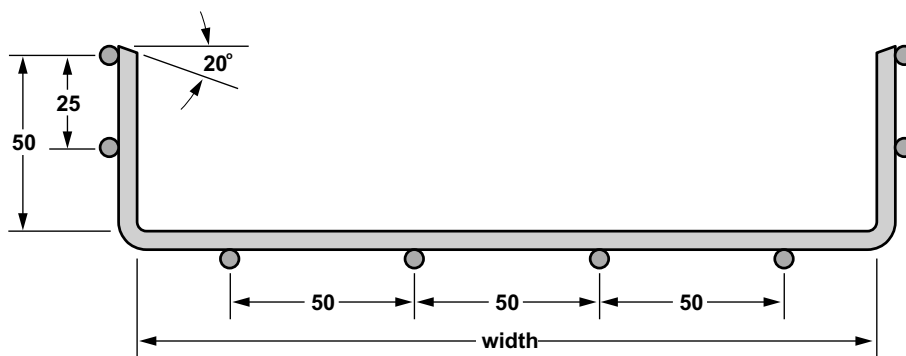

FR7BCM AS/NZ 3013:2005 Fire Rated Cable Mesh Arrangement