

Product Environmental Profile

Iconic Switch Vertical 2gang 1/2 Way 10AX 250V LED






General information

Representative product	Iconic Switch Vertical 2gang 1/2 Way 10AX 250V LED -3042VAL-VW
Description of the product	The main purpose of the Iconic 2 gang 1/2 way switch vertical with an indicator lamp, rated at 10AX 250V AC product is to give a solution for the control of Electricity and Energy consumption Indicator light on switch rocker.
Functional unit	Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current $I_{th} = 10A$, including any conditions specified for overload in operation characterized by the current $I_e = 10A$, for the operating voltage $U_e = 250V$ and a current for short-circuit $I_{cw} = 120 \times I_e \Rightarrow 1200A$ for a specified time with AS/NZs 60669.1 standard.



Constituent materials

Reference product mass	118.69 g including the product, its packaging and additional elements and accessories
-------------------------------	---

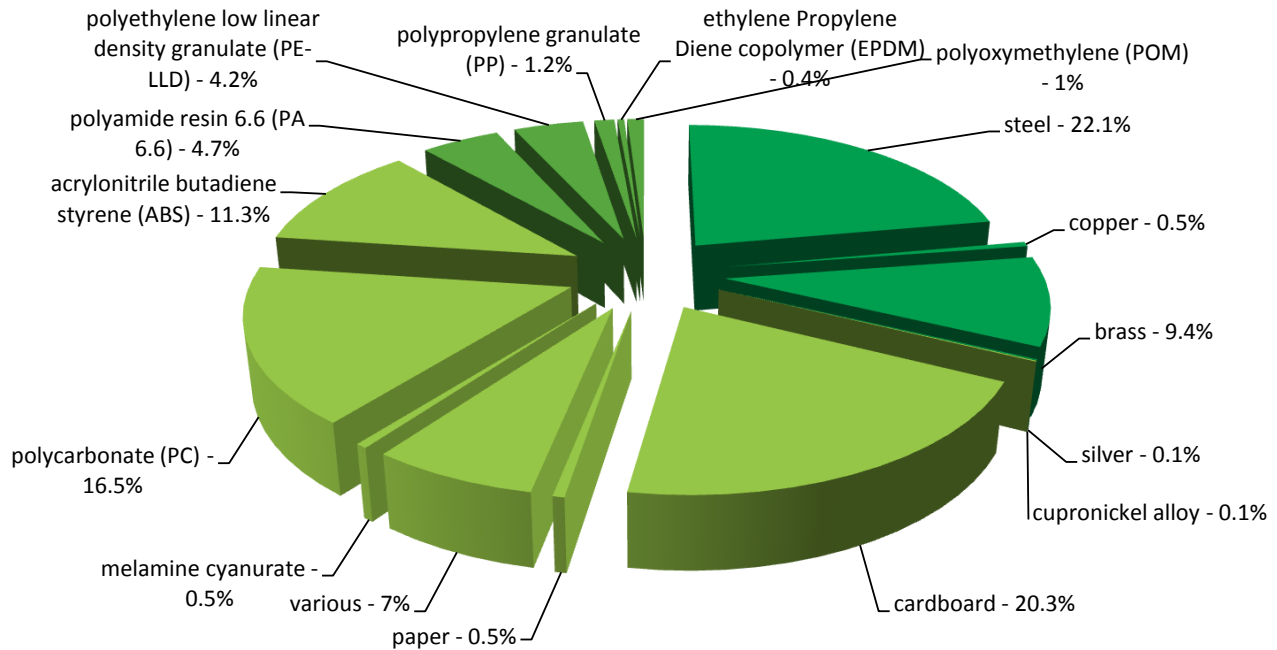

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information

The Iconic Switch Vertical 2gang 1/2 Way 10AX 250V LED presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 29.6 g, consisting of cardboard (86.44%), PE film (11.28%), paper (2.28%) Product distribution optimised by setting up local distribution centres
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic parts (7.1g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 51% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	20 years			
Product category	Passive products - non-continuous operation			
Installation elements	No special components needed			
Use scenario	Product dissipation is 0.07155 W, loading rate is 30% and service uptime percentage is 30%			
Geographical representativeness	Australia, New Zealand, Pacific			
Technological representativeness	The main purpose of the Iconic 2 gang 1/2 way switch vertical with an indicator lamp, rated at 10AX 250V AC product is to give a solution for the control of Electricity and Energy consumption Indicator light on switch rocker.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Vietnam	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU

Compulsory indicators		Iconic Switch Vertical 2gang 1/2 Way 10AX 250V LED - 3042VAL-VW					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1,58E-04	1,58E-04	0*	0*	1,65E-08	0*
Contribution to the soil and water acidification	kg SO ₂ eq	6,46E-03	2,07E-03	6,99E-05	8,85E-06	4,29E-03	2,73E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1,65E-03	4,81E-04	1,61E-05	2,12E-06	1,14E-03	7,48E-06
Contribution to global warming	kg CO ₂ eq	5,17E+00	9,58E-01	1,53E-02	2,97E-03	4,18E+00	1,40E-02
Contribution to ozone layer depletion	kg CFC11 eq	1,20E-07	6,86E-08	3,10E-11	2,24E-10	5,03E-08	6,51E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	7,98E-04	2,06E-04	4,99E-06	9,32E-07	5,83E-04	2,87E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	1,22E-02	7,88E-03	1,37E-06	3,50E-06	4,26E-03	1,28E-05

Total Primary Energy	MJ	8,74E+01	1,79E+01	2,17E-01	4,84E-02	6,91E+01	1,51E-01
----------------------	----	----------	----------	----------	----------	----------	----------

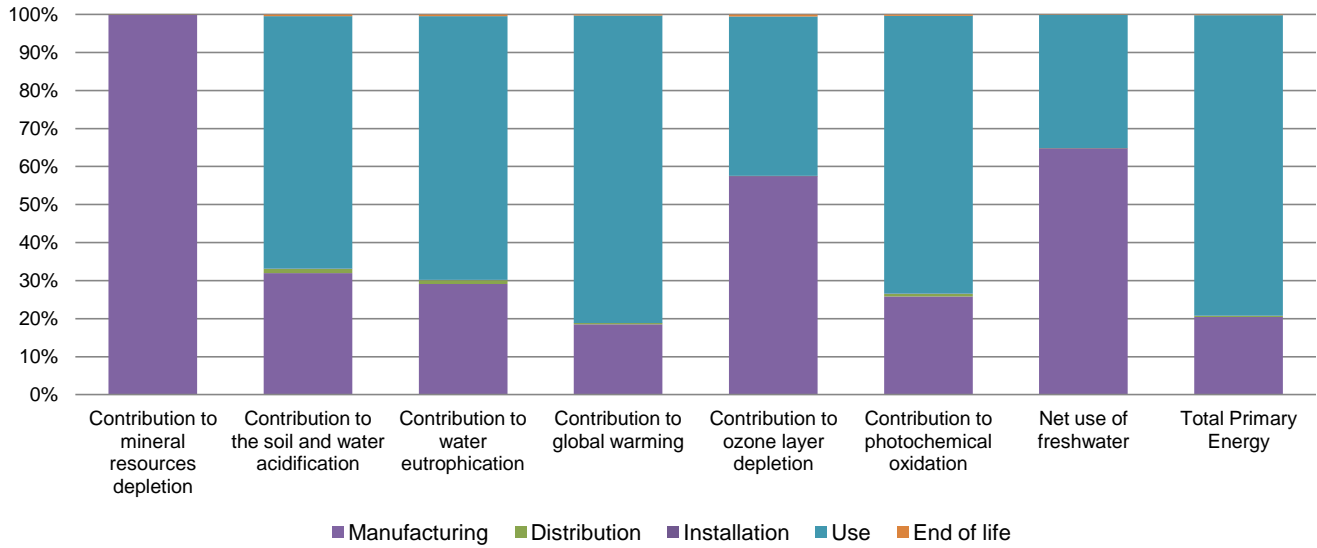

Optional indicators		Iconic Switch Vertical 2gang 1/2 Way 10AX 250V LED - 3042VAL-VW					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7,93E+01	1,33E+01	2,15E-01	3,99E-02	6,56E+01	1,23E-01
Contribution to air pollution	m³	5,85E+02	1,80E+02	6,51E-01	3,12E-01	4,03E+02	9,68E-01
Contribution to water pollution	m³	3,90E+02	1,93E+02	2,52E+00	3,37E-01	1,92E+02	2,40E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,55E-03	1,55E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,97E+00	3,64E-01	2,89E-04	0*	1,61E+00	0*
Total use of non-renewable primary energy resources	MJ	8,54E+01	1,75E+01	2,16E-01	4,84E-02	6,75E+01	1,51E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,48E+00	0*	2,89E-04	0*	1,61E+00	0*
Use of renewable primary energy resources used as raw material	MJ	4,94E-01	4,94E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	8,35E+01	1,56E+01	2,16E-01	4,84E-02	6,75E+01	1,51E-01
Use of non renewable primary energy resources used as raw material	MJ	1,92E+00	1,92E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4,63E+00	4,32E+00	0*	5,48E-02	1,26E-01	1,34E-01
Non hazardous waste disposed	kg	1,62E+00	9,32E-01	5,44E-04	0*	6,83E-01	4,13E-04
Radioactive waste disposed	kg	1,90E-04	1,59E-04	3,88E-07	2,16E-07	2,97E-05	6,58E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5,74E-02	7,25E-03	0*	4,50E-03	0*	4,57E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1,77E-03	2,24E-04	0*	5,00E-05	0*	1,49E-03
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow
 Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1607003	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	07/2016	Supplemented by	PSR-0005-ed1-2012 12 11
Validity period	5 years	Information and reference	www.pep-ecopassport.org
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013			

Schneider Electric Industries SAS

CATHERINE COLIN

catherine.colin@fr.schneider-electric.com

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1607003

© 2015 - Schneider Electric – All rights reserved

07/2016