


STRAIGHT TERMINATOR

Features & Benefits

- PVC 90 Straight Termination Fitting for CNM range Flexible PVC Conduit
- High performing chemical resistance and mechanical strength
- Manufactured to comply with AS 2053.1 and AS 2053.4 "Conduit systems for cable management"
- RoHS, WEEE compliant, UL listed variants available
- Manufactured from a Hi Tech hardened PVC, offering a general purpose non metallic conduit system particularly suitable for food and beverage applications due to the smooth exterior and smooth bore interior, inhibiting particle accumulation, offering excellent protection to wiring abrasion, sunlight, mild acids, alkaline and oils.

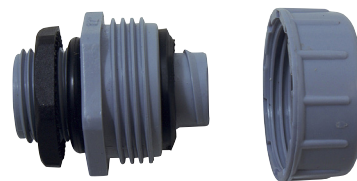

Ordering Information

PART NUMBER	DESCRIPTION
LT16P	Liquid Tight NM Fitting Straight 16mm
LT20P	Liquid Tight NM Fitting Straight 20mm
LT25P	Liquid Tight NM Fitting Straight 25mm
LT32P	Liquid Tight NM Fitting Straight 32mm
LT40P	Liquid Tight NM Fitting Straight 40mm
LT50P	Liquid Tight NM Fitting Straight 50mm

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.