

OM4 LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm Tight Buffer, 6-Fiber Kit Blue - White (1-6)

## Product Classification

**Regional Availability** Asia | Australia/New Zealand | Europe | Latin America | Middle East /Africa | North America

**Portfolio** CommScope®

**Product Type** Fiber pigtail, unjacketed

**Product Brand** SYSTIMAX InstaPATCH® 360

**Ordering Note** For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

## General Specifications

**Color, boot A** Aqua

**Color, connector A** Beige

**Interface, Connector A** LC/UPC

**Total Fibers, quantity** 6


## Dimensions

**Cable Assembly Length Range (m)** 1 – 20

**Cable Assembly Length Range (ft)** 1 – 66

## Ordering Tree

# FAXLCUCOA

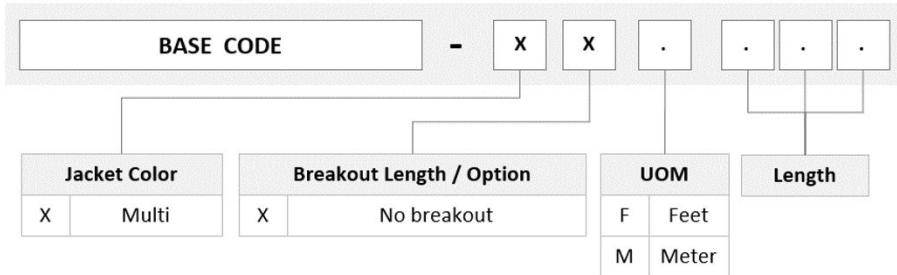

## Mechanical Specifications

**Cable Retention Strength, maximum** 1.00 lb @ 0 ° | 1.00 lb @ 90 °

## Optical Specifications

**Fiber Mode** Multimode

**Fiber Type** OM4, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Unrated

## Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

460125271	- Behind The Wall Pre-Radiused LC Connector for 0.9 mm Fiber, multimode
X-TB-5K	- LazrSPEED® 900µm Tight Buffered Fiber