

© COOLON AZIZ LIGHT™

160W LED High Bay

A compact, bright and versatile high bay

The AZIZ LIGHT $^{\text{TM}}$ is an extremely robust LED high bay luminaire that has superior performance due to its tempered glass lens and cold-forged pure aluminium body.

Perfect for the processing plant and warehouse applications.

Designed for use in:

- Warehouses
- Processing Plant
- Public Spaces
- Retail Stores
- Sports Halls









COOL SURFACE TEMPERATURE

Coolon's industrial LED fittings have a much lower surface temperature than traditional HID equivalents which prevents dirt from baking onto the luminaire. This allows for easier cleaning and prolongs the lifespan of the luminaire.



NO FLICKERING

LED luminaires run on constant low voltage DC power and do not produce any visible stroboscopic effects. This reduces strain on the eyes and significantly improves safety in areas where moving machinery is present.



UNRESTRICTED BURNING POSITION

Coolon's LED luminaires can be positioned and oriented in any direction without affecting the lifespan of the product. This provides greater flexibility when it comes to aiming angles and orientation.



3 YEARS FACTORY WARRANTY

Coolon luminaires are covered by a comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



INSTANT ON/OFF

LEDs do not have a warm up period. Instant on to 100% output translates to no downtime, improved safety and the ability to utilize sensor switching to significantly reduce energy usage.



LONG USEFUL OPERATING LIFE

Currently available specification from world's most reputable LEDs manufacturers states 50,000 hours of continuous operation at the rated current within the operating temperature range to 70% residual light output.



QUALITY WHITE LIGHT W/ HIGH CRI

This luminaire emits light with a spectrum closely resembling that of natural daylight with a relatively high colour rendering index (CRI) greater than 80, enabling excellent colour differentiation.




PROUDLY MADE IN AUSTRALIA


Our products are designed and manufactured in Australia. Engineered to perfection, using the best quality components and highly skilled labour, each luminaire is thoroughly tested to ensure excellence in performance.




DIMENSIONS

AZIZ LIGHT™ 160W Hook Mounted

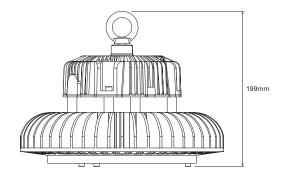



AZIZ LIGHT™ 160W T-Bolt Swivel Bracket

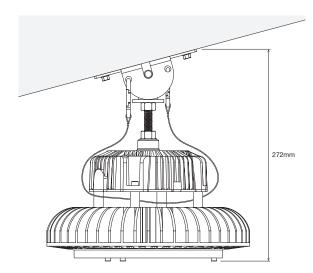

AZIZ LIGHT LED High Bay AZIZLIGHT-160

TECHNICAL SPECIFICATIONS

Product

Model

Optical Characteristics					
Luminous Flux (Photometered)	19,733 - 20,087 lm				
CCT	CWT				
Electrical Characteristics (Luminaire & Power Supply)					
Power Consumption	143W at 25°C				
Nominal Voltage	230VAC				
Voltage Range	100 – 305VAC, 127 – 431VDC				
Frequency Range	47 – 63Hz				
Power Factor	>0.95 / 277VAC				
Leakage Current	<0.75mA / 277VAC				
Cable Type	Standard 3 Core Flex w/ Molded 3 pin AU Plug				
Cable Length	1.5m				

Environmental				
IP Rating	IP66			
Operating Temp. Range	-20 to +50°C			
Thermal Management Type	Active/Continuous			
Expected Lifespan	50,000 Hours to 70% Brightness			
Material Composition (Body)	Cold Forged Aluminium			
Material Composition (Cover)	Tempered Glass			
Material Composition (Bracket)	Stainless Steel			
Weight/Packaging	HKM	SWB		
Luminaire Weight	4.3kg	4.6kg		
Packaging Weight	5.2kg	5.5kg		
Packaging Dimensions	320 x 320 x 230mm			
Compliance (Safety Standards)	<u> </u>			
AS/NZS60598.1	Luminaires - General Requirements and Tests			
AS/NZS 60598.2.1	Luminaires - Particular requirements - Fixed			
	general purpose luminaires			
Compliance (EMC)				
AS/NZS CISPR15	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment			
Warranty				
Warranty	3 years warranty as standard			
	5 years extended warranty optional			

¹ Optical and electrical characteristics are measured using Cool White LEDs (CWT)

² Reading taken while test unit operating in steady state. Ambient temperature during testing is typically 25°C. Individual unit behaviour may differ due to electronic component tolerance and ambient conditions. Product parameters and application suitability shall be checked by the user prior to commissioning.





COLOUR TEMPERATURES



All colour temperatures are indicative. Some variation can occur.

ILLUMINANCE AT DISTANCE

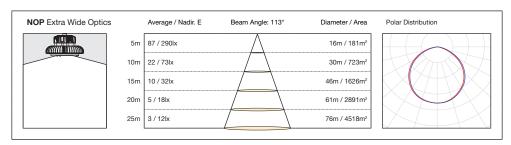

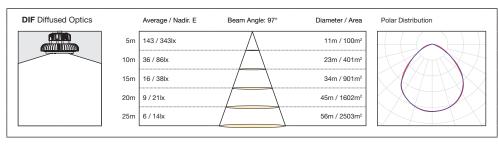

ORDERING EXAMPLE



PRODUCT	TYPE	COLOUR TEMP	OPTICS	MOUNTING	SUPPLY OPTION
AZIZ LIGHT™	160 160W	CWT Cool White	NOP Extra Wide Optics	HKM Hook Mounted	MP Mains Powered
			DIF Diffused	SWB T-Bolt Swivel Bracket	