

Empty pendant control station, Harmony XAC, plastic, yellow, 8 cut outs, for cable 10...22mm

XACB08

Main

Range of product	Harmony XAC		
Product or component type	Pendant control station		
Device short name	XACB		

Complementary

Double insulated			
Glass reinforced polyester			
Power circuit Control circuit			
Empty enclosure			
8 cut-outs			
Yellow			
Rubber sleeve with stepped entry 1022 mm			
Without			
40 mm			
IEC 60947-5-1 CSA C22.2 No 14			
CSA type 4			
тн			
-2570 °C			
-4070 °C			
15 gn (f= 10500 Hz) conforming to IEC 60068-2-6			
100 gn conforming to IEC 60068-2-27			
Class II conforming to IEC 61140			
IP65 conforming to IEC 60529			
IK08 conforming to IEC 62262			
1000000 cycles			
1.33 kg			

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	10.200 cm
Package 1 Width	11.200 cm
Package 1 Length	69.600 cm
Package 1 Weight	1.378 kg
Unit Type of Package 2	P06
Number of Units in Package 2	25
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	48.175 kg

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration


Use Again

○ Repack and remanufacture		
Take-back	No	

Dimensions Drawings

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

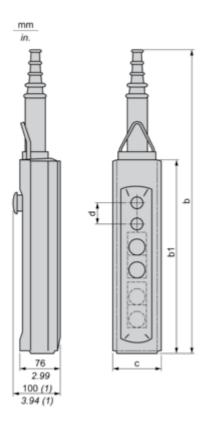

(1) With mushroom head operator


Dimensions in mm

Number of cut-outs	2	4	6	8	12
b	409	499	589	679	679
b1	220	310	400	490	490
С	98	98	98	98	98
d	40	40	40	40	30

Dimensions in in.

Number of cut-outs	2	4	6	8	12
b	16.10	19.64	23.19	26.73	26.73
b1	8.66	12.20	15.75	19.29	19.29
С	3.86	3.86	3.86	3.86	3.86
d	1.57	1.57	1.57	1.57	1.18

Protective cable sleeves




(1) Internal ø

Connections and Schema


Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately



Control of 2-Speed Reversing Motor


With XESD1281 contact block, to be ordered separately

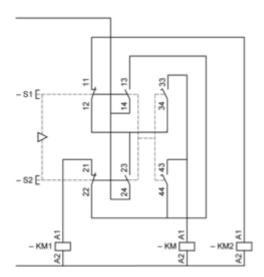


KM High speed contactor

Control of Single-Speed Reversing Motor 2-Phase Switching

With XESD1191 contact block, to be ordered separately

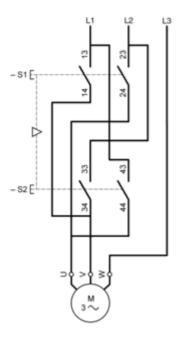


Combined with 3-pole isolating block XACS399 or XACS3991, shown in the unoperated position (pendant station "supplied"), fitted with key release trigger action latching Emergency stop operator.

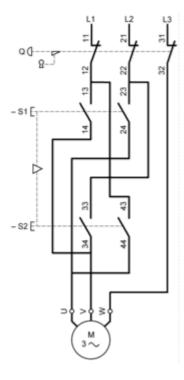


Control of 2-Speed Reversing Motor 2-Phase Switching

With XESD1291 contact block, to be ordered separately

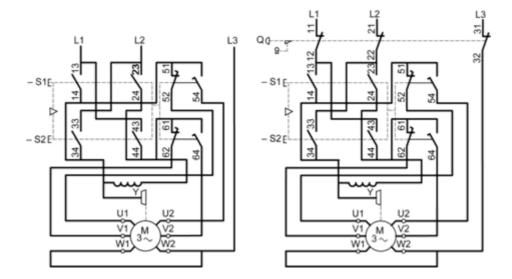


Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately

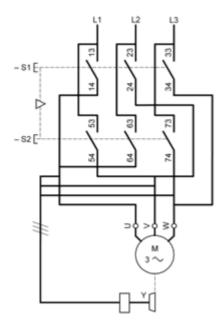

Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2241 contact block, to be ordered separately

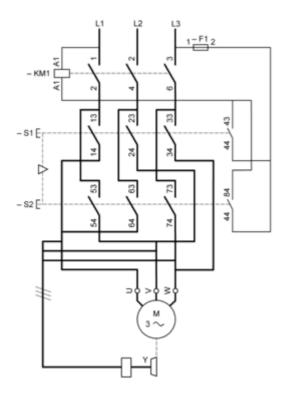

11

Image of product / Alternate images

Alternative





Product datasheet

XACB08







