

Editable voice alarms, Harmony XVS, black, mounting 96mm DIN rail, PNP, 12...24V DC

XVSV9BBP

### Main

Range of product	Harmony XVS
Product or component type	Editable electronic alarm
Beacon or indicator bank unit type	Sound unit
Device short name	XVSV

## Complementary

Colour	Dark grey
Input type	Bit: 6 channel input Binary: 63 channel input
Assembly style	Ready assembled
Material	PC (polycarbonate): body PC (polycarbonate): back cover TPE (thermoplastic elastomer): front panel NBR (nitrile butadiene rubber)
Marking	CE
Overvoltage category	Class II conforming to IEC 61140
Mounting support	96 mm DIN rail
[Us] rated supply voltage	1224 V DC
[Ue] rated operational voltage	1030 V DC
[Ui] rated insulation voltage	250 V
Inrush current	30 A
Associated fuse rating	1 A
[Uimp] rated impulse withstand voltage	2.5 kV conforming to IEC 60947-1
Power consumption in W	3.8 W
Current consumption	160 mA at 24 V DC
Clamping connection capacity	<= 1 x 1.5 mm²
Device application	Printing Packaging Subway
Mounting diameter	105 mm
Width	105 mm
Height	105 mm
Depth	50.1 mm
Net weight	0.268 kg

### **Environment**

Discrete output type	PNP	
Signalling type	Adjustable vocal sound	
Standards	IEC 60947-5-1	
Protective treatment	TC	
Ambient air temperature for storage	-2060 °C	
Ambient air temperature for operation	-1055 °C	
pollution degree	2	
Relative humidity	3585 % without condensation	
Vibration resistance	7 gn	
IP degree of protection	pree of protection Panel mounted: IP65 conforming to IEC 60529  Wall mounted: IP20	
Noise level	097 dB (stop or suppress) at 1 m	

## **Packing Units**

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.000 cm
Package 1 Width	10.500 cm
Package 1 Length	10.500 cm
Package 1 Weight	268.000 g



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	6	
Environmental Disclosure	Product Environmental Profile	

#### **Use Better**


─────────────────────────────────────			
Packaging made with recycled cardboard	Yes		
Packaging without single use plastic	Yes		
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
SCIP Number	Fe0ee3ab-dd49-4abe-bd8e-c49754e2c442		
REACh Regulation	REACh Declaration		

#### **Use Again**

○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No

### **Dimensions Drawings**

#### **Dimensions**

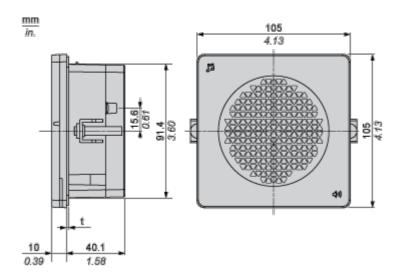


(t): Waterproof rubber (1.6 mm / 0.06 in.)

## XVSV9BBP

## Mounting and Clearance


### **Panel Cut Dimensions**

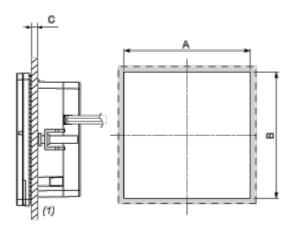

#### (1) Installation panel

A	В	С
92 +0.6/0 mm (3.62 +0.0236/0 in.)	92 +0.6/0 mm (3.62 +0.0236/0 in.)	14 mm (0.040.15 in.)


#### **Wall Mount Dimensions**

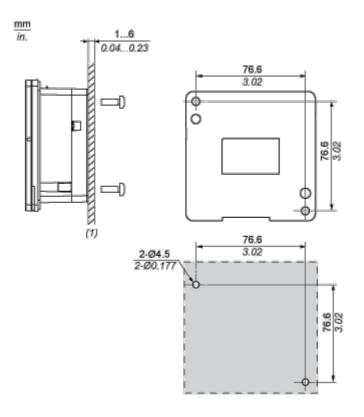

(1) Installation panel

#### Connections and Schema


### Wiring Diagram

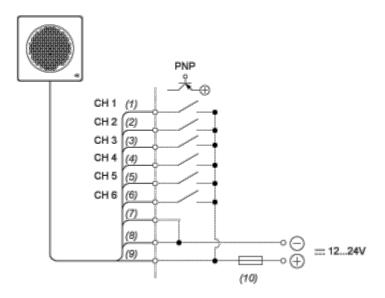

- (1) Green
- (2) Yellow
- (3) Brown
- (4) Blue
- (5) Purple
- (6) Gray
- (7) White
- (8) Black
- (9) Red
- (10) Fuse (Rated current:1 A)


#### **Technical Illustration**

#### **Dimensions**

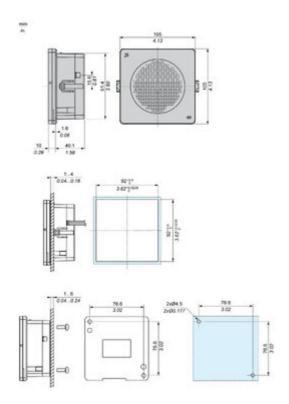

#### **Technical Illustration**

### Wiring diagram

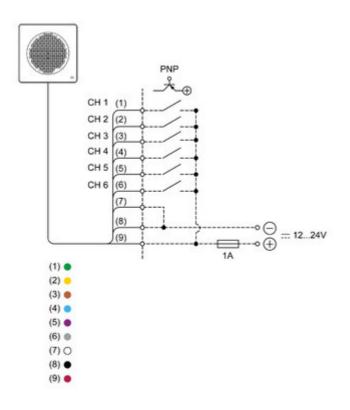

#### XVSV9BBP

Offer Marketing Illustration

#### **Product benefits / Features**



Offer Marketing Illustration

#### **Product benefits / Features**

# **Technical Benefits**

Harmony XVSV



Image of product / Alternate images

**Alternative** 











