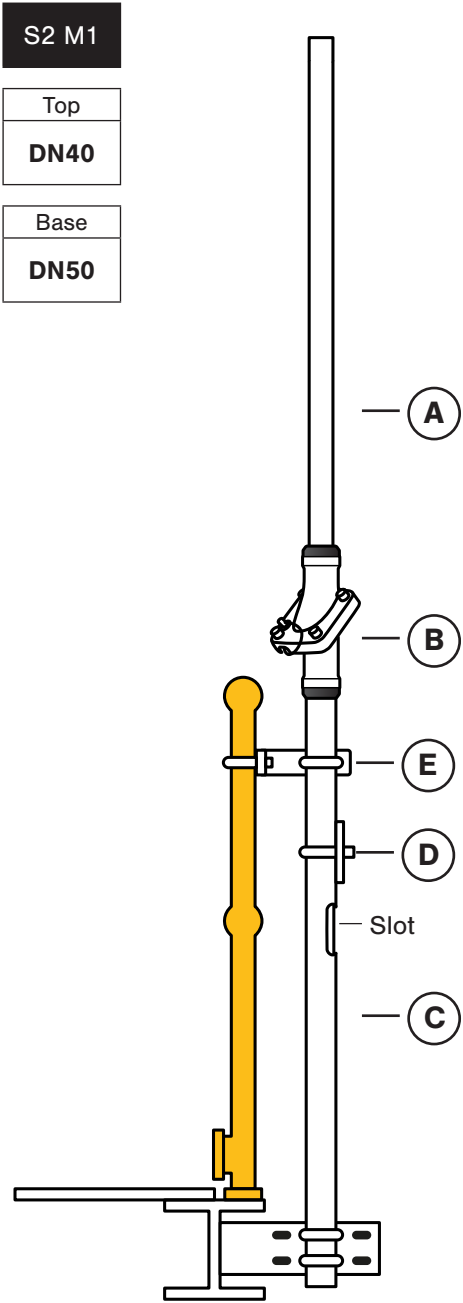


Swivelpole™ S2 M1 Stanchion & Structure Mounted

2.4 – 3m	Industrial
Guardrail Solution	



S2 M1
Top
DN40
Base
DN50

Designed for installation in accordance with IEC standards

Overview

- A Pole Top Section**
- B Maxis™ joint**
- C Pole Base Section**
- D Junction Box Plate (optional)**
- E Mounting Brackets (optional)**

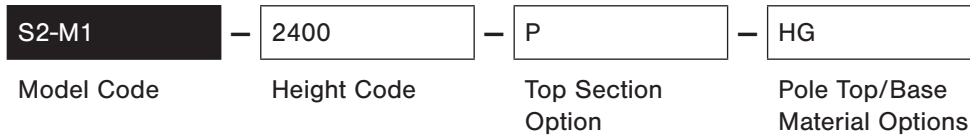
Applications

Ideal for lighting on walkways, platforms, stairways, spiral stairways, conveyors.



Scan Code with QR Reader App for more information on Swivelpole™ S2 M1.

Product Coding Logic



Heights

Height Code	Installed Heights (Nominal)
2400	2.4 m ▶
3000	3.0 m ▶

Specified Loads

Max Combined Weight
20 kg
20 kg

Top Section Options




P	Plain Pole Top
---	----------------

Material Options

Maxis™ joint - Steel / Zinc Aluminium Coating*	
HG	Steel / Hot-Dip Galvanised

*Zinc Aluminium is suitable with hot-dip galvanised or aluminium

Related Components

<p>Junction Box Plates for safe and efficient installation and termination.</p>		<p>p. 48</p>
<p>Mounting Brackets available to suit various stanchion types.</p>		<p>p. 45</p>
<p>Luminaire & Equipment Mounts to suit popular light fixtures (luminaire) and equipment.</p>		<p>p. 47</p>