




Platinum Spitfire Dual LED Recessed Nexus RF

- Compliance to latest ASNZS2293.3:2018.
- Reliable Stanilite Brand.
- LED energy efficient products.
- 10 year product design life.
- Lithium ion phosphate batteries.
- Advanced power management.

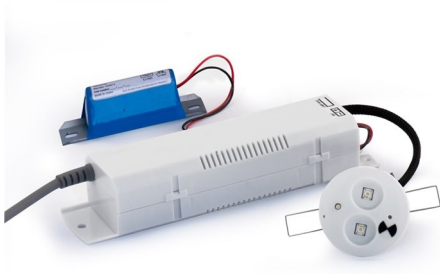

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type	Emergency Lighting	Spitfire
Testing System		Nexus RF Infinity
Operating Mode		Non-Maintained
Operating Voltage		240 VAC
Rated Frequency		50 Hz
Power Consumption		1.0 W
Mounting		Recessed
LED Life		100,000 hours
Photometric Classification		C0:D63 C90:D63
Battery Type		LiFePO4
Base Colour		White
Battery Replacement		0301303P
IP Rating		IP20
Standards Compliance		ASNZS CISPR 15 ASNZS2293.3:2018 ASNZS60598.1:2017 ASNZS60598.2.22:2005

Catalogue No: **SFNRF2LEDP**

PLATINUM SPITFIRE DUAL LED RECESSED NEXUS RF

Stanilite Emergency and Exit Lighting > Platinum > Monitored Platinum > Platinum Spitfire RF



REFERENCES

IECEX Certificate

-

Supplier Declaration of
Conformity:

[Spitfire Recessed Emergency, NiCad or LifePO4 Battery_Supplier Declaration of Conformity \(SDoC\)](#)

Installation Guide:

[Stanilite Platinum Spitfire LED Recessed Nexus RF_Installation Instructions](#)

User Manual:

-

Manufacturer Datasheet:

[Platinum Spitfire LED Recessed DALI Non-Maintained_Manufacturer Datasheet](#)

Manufacturer Catalogue
& Product Selection:

-