




Platinum Range Recessed Spitfire 2 LED

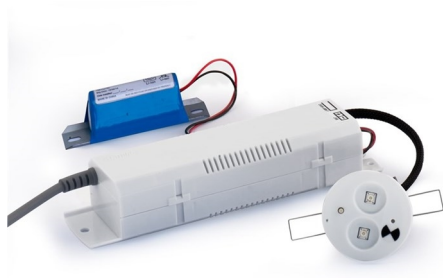

- Compliance to latest ASNZS2293.3:2018.
- Reliable Stanilite Brand.
- LED energy efficient products.
- 10 year product design life.
- Lithium ion phosphate batteries.
- Advanced power management.

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS	
Component Type	Emergency Lighting
Testing System	Spitfire
Operating Mode	Single Point Unit
Operating Voltage	Non-Maintained
Rated Frequency	240 VAC
Power Consumption	50 Hz
Mounting	1.0 W
LED Life	Recessed
Photometric Classification	100,000 hours
Battery Type	C0:D63 C90:D63
Base Colour	LiFePO4
Battery Replacement	White
IP Rating	0301303P
Standards Compliance	IP20
	ASNZS CISPR 15 ASNZS2293.3:2018 ASNZS60598.1:2017 ASNZS60598.2.22:2005

Catalogue No: **SF2LEDP**

PLATINUM RANGE RECESSED SPITFIRE 2 LED

Stanilite Emergency and Exit Lighting > Platinum > Single Point Platinum > Platinum Spitfire EM



REFERENCES

IECEX Certificate

-

Supplier Declaration of
Conformity:

[Spitfire Recessed Emergency, NiCad or LifePO4 Battery_Supplier Declaration of Conformity \(SDoC\)](#)

Installation Guide:

-

User Manual:

-

Manufacturer Datasheet:

[Platinum Spitfire LED Recessed Non-maintained_Manufacturer Datasheet](#)

Manufacturer Catalogue
& Product Selection:

-