



## ANOVA S9105 ST - 4W

Compact 4 watt surface mount LED cabinet luminaire

### Application


Ideal for any residential or commercial feature lighting

### Design Specifications

- Durable die-cast aluminium body profile
- White powder coat or satin nickel plated finish
- High efficiency LED optics
- CCT choice of 3000K or 6000K
- 12V DC remote driver required, suitable drivers - PLUTO EGL12V/6W, PLUTO 15DV, 40DV, 60DV

### Performance

- Dimmable - **NO**

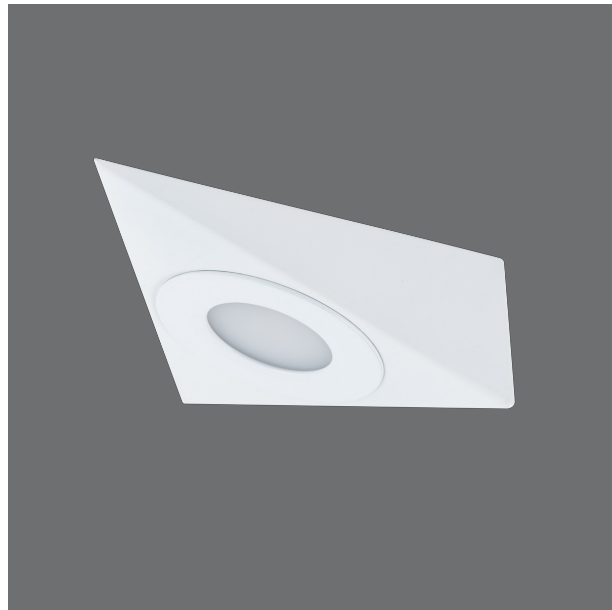

### Technical Specification


| Product | Model No.     | Input Voltage (V/DC) | Power (W) | Lumens (lm) | CCT (K) | CRI |
|---------|---------------|----------------------|-----------|-------------|---------|-----|
|         | S9105WW ST/WH | 12                   | 4         | 280         | 3000    | 80  |
|         | S9105DL ST/WH | 12                   | 4         | 280         | 6000    | 80  |
|         | S9105WW ST/SN | 12                   | 4         | 280         | 3000    | 80  |
|         | S9105DL ST/SN | 12                   | 4         | 280         | 6000    | 80  |

| Beam Angle (°) | Dimmable | Dim (mm)                | Body Colour  |
|----------------|----------|-------------------------|--------------|
| 90             | NO       | 125(L) x 125(W) x 45(H) | WHITE        |
| 90             | NO       | 125(L) x 125(W) x 45(H) | WHITE        |
| 90             | NO       | 125(L) x 125(W) x 45(H) | SATIN NICKEL |
| 90             | NO       | 125(L) x 125(W) x 45(H) | SATIN NICKEL |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

### S9105 ST

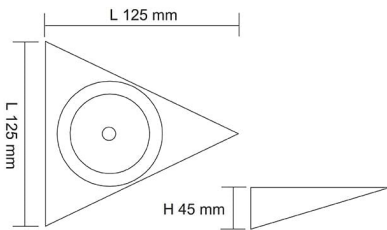

## Photometric Data

Unit: cd C0/C180 — C90/C270 —

### S9105WW ST at 3000K

