



NEWMAN III S9525 - 15W/25W/35W

Retractable & rotatable LED Shoplight

Application

Ideal for any retail or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- Optimum tilting function 60° (-15° ~ +45°) and rotating 340°
- High output LED optics, 40° standard beam
- High performance optical lens with a changeable multi-faceted reflector system
- Remote, non-dimmable LED driver, with flex and plug, double insulated

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9525/92WW/WH	240	15	1300	3000	40
	S9525/92CW/WH	240	15	1400	4000	40
	S9525/92DL/WH	240	15	1500	5000	40
	S9525/125WW/WH	240	25	1900	3000	24
	S9525/125CW/WH	240	25	2000	4000	24
	S9525/125DL/WH	240	25	2100	5000	24
	S9525/145WW/WH	240	35	2600	3000	40
	S9525/145CW/WH	240	35	2700	4000	40
	S9525/145DL/WH	240	35	2800	5000	40

Dimmable	CRI	Body Colour	Cut Out (mm)
YES	80	WHITE	92
YES	80	WHITE	92
YES	80	WHITE	92
OPTIONAL	80	WHITE	125
OPTIONAL	80	WHITE	125
OPTIONAL	80	WHITE	125
OPTIONAL	80	WHITE	145
OPTIONAL	80	WHITE	145
OPTIONAL	80	WHITE	145


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions


S9525 - 92

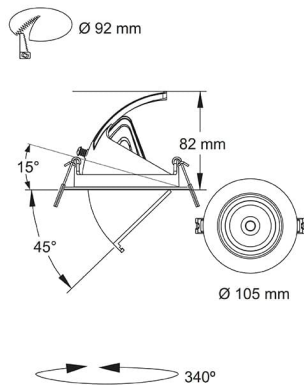

S9525 - 125

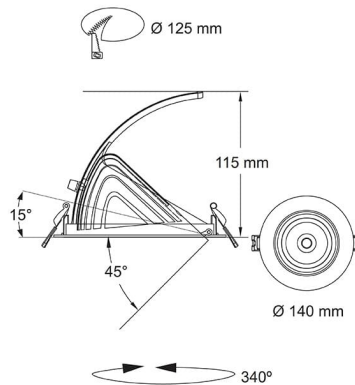

S9525 - 145

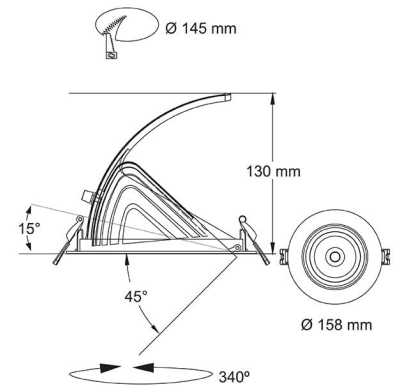

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9525/92WW/WH at 3000K

S9525/145WW/WH at 3000K

