



STAR SPOT S9361CW - 4W

Compact design LED 4 watt downlight, IP20

Application

Ideal for any residential feature lighting or commercial interior spaces

Design Specifications

- 42mm diameter trim face, low profile design, 35mm cut-out
- Available in Satin Nickel or White finish
- Durable aluminium body profile
- CCT 4000K, 250 lumens
- High output LED optics, 40° beam distribution
- Two options available, (1) with a non-dimmable (4 watt system) remote driver, with flex and plug or (2) 12V DC head assembly only
- Class III (head only), KIT double insulated.
- For multiple head configurations, the recommended SAL driver is the **PLUTO FC series**



Performance

- Dimmable - **NO**




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Input Voltage (V/DC)	Power (W)	Lumens (lm)	CCT (K)
	S9361CW/SN	240		4	250	4000
	S9361CW/WH	240		4	250	4000
	S9361CW/SN/ND		12	3	250	4000
	S9361CW/WH/ND		12	3	250	4000

Beam Angle (°)	Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
40	NO	80	SATIN NICKEL	35	42	35(H)
40	NO	80	WHITE	35	42	35(H)
40	NO	80	SATIN NICKEL	35	42	35(H)
40	NO	80	WHITE	35	42	35(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

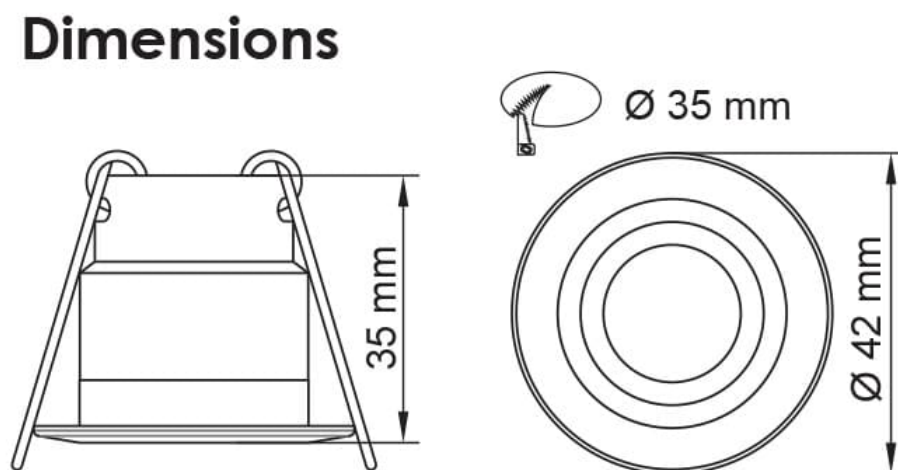

Photometric Data

Unit: cd C0/C180 — C90/C270 —

