



LOUNGE II S9328/220TC - 15W

15 watt decorative IP54 architectural LED wall mount luminaire, with selectable CCT

Application

A decorative architectural solution for residential, commercial interior or exterior spaces

Design Specifications

- Selectable CCT 3000K / 4000K / 5000K
- Durable white or black powder coated finish
- Integral non-dimmable control gear 15 watt
- Robust die-cast aluminium body profile
- High efficiency LED optics
- Indirect illumination (up and down) optical performance

Performance

- Dimmable - **NO**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	S9328/220TC/WH	240	15	800/1000/900	3000/4000/5000	80
	S9328/220TC/BK	240	15	800/1000/900	3000/4000/5000	80

Beam Angle (°)	Dim (mm)	Body Colour
100	220(L) x 90(W) x 55(H)	WHITE
100	220(L) x 90(W) x 55(H)	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

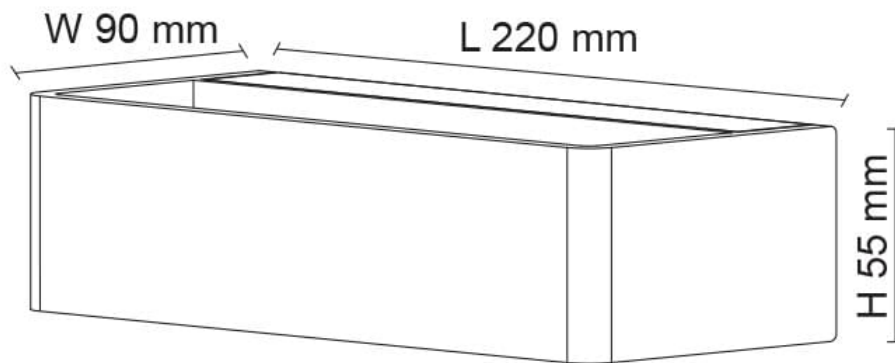

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9328/220TC at 5000K

