



PREMIER S9076TC DP/HP - 18W/40W

Non-dimmable 18/40 watt LED downlight with selectable CCT and power, IP64

Application

Ideal for any residential, retail or commercial interior spaces

Design Specifications

- Premium aluminium body, IC-4 rated
- Stylish white powder coat finish
- Recessed opal polycarbonate diffuser
- High efficiency LED optics CRI>90
- Remote, non-dimmable, dual power LED driver, with flickerCONTROL technology and flex and plug
- Double insulated

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Dual power, 1-10V, DALI / DSI - Half power, trailing edge, 1-10V, DALI / DSI**



NEED A HAND
PACKING YOUR
PRODUCT DATA
SHEETS?
GIVE THE SAL
SHOPPING CART
A GO.



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Multiple Wattage	Lumens (lm)	CCT (K)
	S9076TC/WH/HP	240	18		2100/2300/2200	3000/4000/5700
	S9076TC/WH/DP	240		30/40	3500/4200/3800	3000/4000/5700

Beam Angle (°)	Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
90	OPTIONAL	80	White	240	280	96(H)
90	OPTIONAL	90	White	240	280	96(H)


IPART	REES	VEET
YES	YES	YES

Note: Lumens (lm) shown are displayed at maximum power rating

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

S9076TC

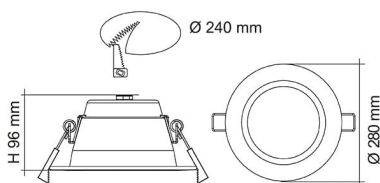

Photometric Data

Photometric Data

Unit: cd C0/C180 C90/C270

S9076TC/WH/DP at 4000K

