



## COLUMN S9603 - 20/28W

Surface mount LED downlight, with three (3) sizes to select

### Application







Apartment foyers, commercial walkways, surface mount installation restrictions.

### Design Specifications

- Die cast aluminium body profile, concealed mounting screws and matt white powder coat finish
- Deep recessed angle fitting provides excellent glare control and light distribution
- High output LED optics, with a changeable multi-faceted reflector system
- Integral constant current, non-dimmable LED driver, 20 watt to 28 watt capacity
- Beam angle 36 standard



## Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	<b>S9603/80/15CW</b>	240	13	1500	4000	36
	<b>S9603/80/20CW</b>	240	20	2000	4000	36
	<b>S9603/110/34CW</b>	240	28	3400	4000	28
	<b>S9603/150/42CW</b>	240	34	4200	4000	30
	<b>S9603/150/49CW</b>	240	38	4900	4000	30
	<b>S9603/150/62CW</b>	240	52	4600	4000	30

CRI	Body Colour	Dim (mm)
80	matt white	80(W) x 126(H)
80	matt white	80(W) x 126(H)
80	matt white	110(W) x 148(H)
80	matt white	150(W) x 171(H)
80	matt white	150(W) x 171(H)
80	matt white	150(W) x 171(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions


S9603

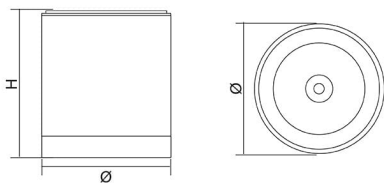

## Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9603/80/15CW at 4000K



S9603/150/49CW at 4000K

