



PANEL MK II S9754 - 18/48W

LED panel with selectable colour temperature

Application

Designed for commercial and office space lighting tasks.


Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser suitable for a range of installation types.
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI > 80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K / 4000K / 5700K for TC models
- Suspended wire kits available, Emergency models compliant to AS/NZS2293 with D50 spacing classification available.

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V (excluding S9754/612) , DALI / DSI**

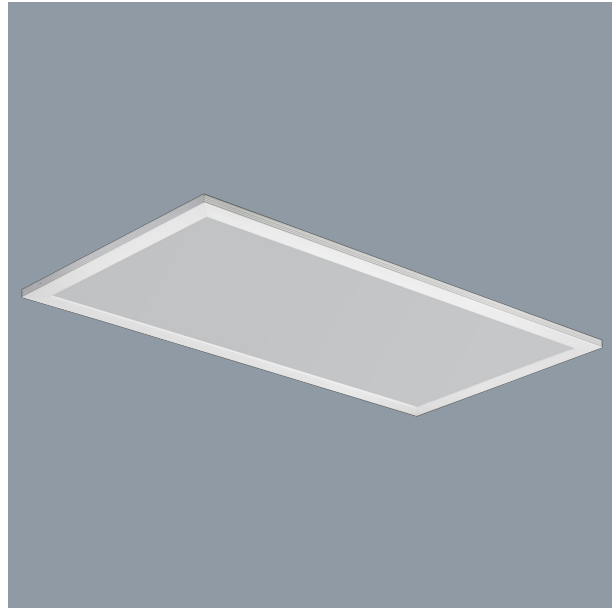

COOL WHITE
4000K

DAYLIGHT
6000K

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
S9754/606CW	LED PANEL 30W 595 X 595 X 12mm 4K	240	30	3200	4000	80
S9754/606DL	LED PANEL 30W 595 X 595 X 12mm 4K	240	30	3300	6000	80
S9754/312CW	LED PANEL 30W 295 X 1195 X 12mm CW WH	240	30	3100	4000	80
S9754/312DL	LED PANEL 30W 295 X 1195 X 12mm DL WH	240	30	3200	6000	80
S9754/612CW	LED PANEL 48W 595 X 1195 X 12mm 4K	240	48	5200	4000	80
S9754/612DL	LED PANEL 48W 595 X 1195 X 12mm 6K	240	48	5200	6000	80
S9754/306TC	LED PANEL 18W 295 X 595 X 12mm 3/4/6K	240	18	1900/2000/2100	3000/4000/5700	80
S9754/606TC	LED PANEL 30W 595 X 595 X 12mm 3/4/6K	240	30	3100/3200/3300	3000/4000/5700	80
S9754/312TC	LED PANEL 30W 295 X 1195 X 12mm 3/4/6K	240	30	3000/3100/3200	3000/4000/5700	80
S9754/312TC/DIM	LED PANEL 30W 295 X 1195 X 12mm 3/4/6K DIM	240	30	3000/3100/3200	3000/4000/5700	80
S9754/612TC	LED PANEL 48W 595 X 1195 X 12mm 3/4/6K	240	48	5000/5200/5300	3000/4000/5700	80
S9754/306EM	LED PANEL 18W 295mm X 595 X 12mm EMERG.	240	18			80
S9754/312EM	LED PANEL 30W 295 X 1195 X 12mm EMERG	240	30			80
S9754/612EM	LED PANEL 48W 595 X 1195 X 12mm EMERG	240	48			80
S9754/606EM	LED PANEL 30W 595 X 595 X 12mm EMERG.	240	30			80

Technical Specification


Model No.	Beam Angle (°)	Body Colour	Dim (mm)
S9754/606CW	100	White	595(L) x 595(W) x 12(H)
S9754/606DL	100	White	595(L) x 595(W) x 12(H)
S9754/312CW	100	White	1195(L) x 295(W) x 12(H)
S9754/312DL	100	White	1195(L) x 295(W) x 12(H)
S9754/612CW	100	White	1195(L) x 595(W) x 12(H)
S9754/612DL	100	White	1195(L) x 595(W) x 12(H)
S9754/306TC	100	White	595(L) x 295(W) x 12(H)
S9754/606TC	100	White	595(L) x 595(W) x 12(H)
S9754/312TC	100	White	1195(L) x 295(W) x 12(H)
S9754/312TC/DIM	100	White	1195(L) x 295(W) x 12(H)
S9754/612TC	100	White	1195(L) x 595(W) x 12(H)
S9754/306EM	100	White	595(L) x 295(W) x 12(H)
S9754/312EM	100	White	1195(L) x 295(W) x 12(H)
S9754/612EM	100	White	1195(L) x 595(W) x 12(H)
S9754/606EM	100	White	595(L) x 595(W) x 12(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9754/312TC at 4000K

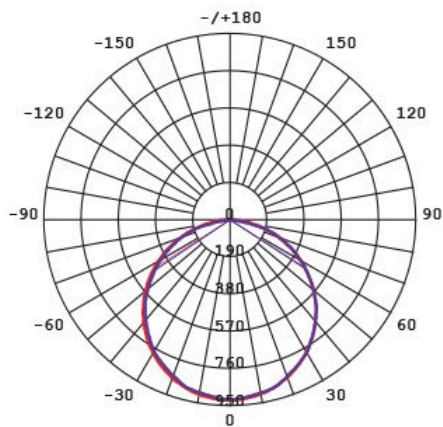

S9754/606TC at 5700K

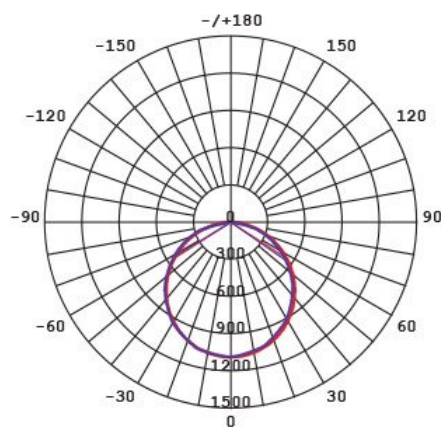

Product Images

