



L-LINE MKII S9734 - 38W

LED louvre troffer MKII

Application


LED conventional commercial troffer design for interior spaces

Design Specifications


- Pressed steel body profile
- White powder coated finish
- Double parabolic matt aluminium louvre
- High efficiency LED optics, UGR <19
- Opal polycarbonate LED diffuser, CRI > 80, CCT 4000K
- 240V constant current non-dimmable LED driver

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

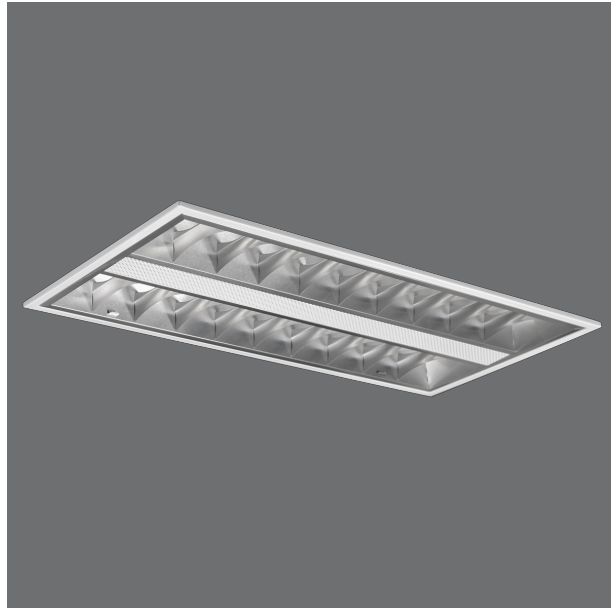

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	S9734/312L/CW	240	38	3500	4000	80


Beam Angle (°)	Body Colour	Dim (mm)	Mass (kg)	IPART	REES	VEET
100	WHITE	1195(L) x 295(W) x 65(H)	3.78	YES	YES	N/A

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

S9734 312 (1195 X 295 X 65mm)

S9734/312L



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9734/312L/CW at 4000K

