



PANEL S9754HC - 40/50W


Premium 40 watt LED high CRI >95, low COI <1.8

Application

Low COI <1.8 suitable for use in hospitals and medical centres to achieve compliance with AS/NZS 1680.2.5

Design Specifications

- Cyanosis Observation Index (COI <1.8) compliant with AS/NZS 1680.2.5
- Extruded aluminium profile with high efficiency opal diffuser
- White powder coated finish
- High efficiency LED optics, CRI >95 beam distribution 100°, SDCM < 6
- Remote non-dimmable LED driver
- **Suspended wire kits available**
Emergency models compliant to AS/NZS2293, [see SEL20PK EM Power Kit.](#)

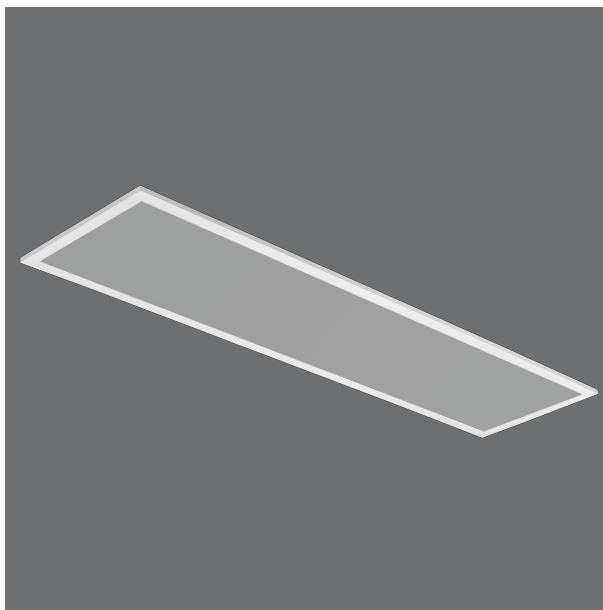

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **1-10V (excluding S9754HC/612CW)**
DALI / DSI



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	S9754HC/312CW	240	40	2800	4000	95
	S9754HC/606CW	240	40	3200	4000	95
	S9754HC/612CW	240	50	4000	4000	95


Beam Angle (°)	Body Colour	Dim (mm)	Mass (kg)	IPART	REES	VEET
100	WHITE	1195(L) x 295(W) x 9(H)	2.4	YES	YES	YES
100	WHITE	595(L) x 595(W) x 12(H)	2.4	YES	YES	YES
100	WHITE	1195(L) x 595(W) x 12(H)	4	YES	YES	YES

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Photometric Data

Unit: cd C0/C180 C90/C270

S9754HC/312CW at 4000K



S9754HC/606CW at 4000K

