



STEIN SE7148 - 32W

IP65 LED architectural wall luminaire - up and down

Application

A decorative residential / commercial exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system, standard beam distribution 17° UP/DOWN
- Narrow beam (NB) distribution option (UP) 8° / (DOWN) 17° available
- Integral non-dimmable LED driver



Performance

- Dimmable - **NO**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SE7148WW/BK	240	32	1275/1275	3000	80
	SE7148WW/CB	240	32	1275/1275	3000	80
	SE7148CW/BK	240	32	1315/1315	4000	80
	SE7148CW/CB	240	32	1315/1315	4000	80
	SE7148NB/WW/BK	240	32	1275/630	3000	80
	SE7148NB/WW/CB	240	32	1275/630	3000	80
	SE7148NB/CW/BK	240	32	1315/650	4000	80
	SE7148NB/CW/CB	240	32	1315/650	4000	80

Beam Angle (°)	Mass (kg)	Dim (mm)	Body Colour
17	5.1	234(W) x 286(H)	BLACK
17	5.1	234(W) x 286(H)	CHARCOAL BLACK
17	5.1	234(W) x 286(H)	BLACK
17	5.1	234(W) x 286(H)	CHARCOAL BLACK
8.17		234(W) x 286(H)	BLACK
8.17		234(W) x 286(H)	CHARCOAL BLACK
8.17		234(W) x 286(H)	BLACK
8.17		234(W) x 286(H)	CHARCOAL BLACK

NOTE: Lumens (lm) displayed are per optical head, NB models beam distribution (DOWN 17° / UP 8°)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

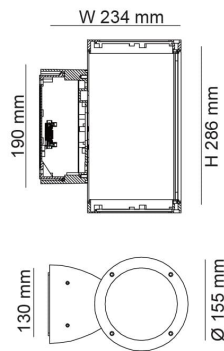

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7148WW at 3000K

