



CANOPY SHP205 - 75/150W

IP65 LED recessed or surface mount canopy luminaire

Application

Commerical or industrial canopy applications

Design Specifications

- Stylish die-cast aluminium body, with stainless steel safety lanyard
- Durable white powder coated finish
- High efficiency LED optics, frosted PC diffuser, 120° beam
- Symmetrical light distribution
- Integral non-dimmable LED driver
- 300 mm pre-wired 3 x core rubber flex

Performance

- Dimmable - **NO**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	Beam Angle (°)	CCT (K)
	SHP205/75RCS	240	75	9750	120	5000
	SHP205/75SM	240	75	9750	120	5000
	SHP205/75RC	240	75	9750	120	5000
	SHP205/110RCS	240	110	14300	120	5000
	SHP205/110SM	240	110	14300	120	5000
	SHP205/110RC	240	110	14300	120	5000
	SHP205/150RCS	240	150	19500	120	5000
	SHP205/150SM	240	150	19500	120	5000
	SHP205/150RC	240	150	19500	120	5000

CRI	Body Colour	Dim (mm)	Mass (kg)	VEET
75	WHITE	502(L) x 420(W) x 60(H)	7.5	YES
75	WHITE	420(L) x 420(W) x 80(H)	7.5	
75	WHITE	600(L) x 600(W) x 66(H)	12	
75	WHITE	502(L) x 420(W) x 60(H)	7.5	YES
75	WHITE	420(L) x 420(W) x 80(H)	7.5	
75	WHITE	600(L) x 600(W) x 66(H)	12	
75	WHITE	502(L) x 420(W) x 60(H)	7.5	YES
75	WHITE	420(L) x 420(W) x 80(H)	7.5	
75	WHITE	600(L) x 600(W) x 66(H)	12	

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions



SHP205 RC






SHP205 RCS




SHP205 SM

Dimensions




Photometric Data

SHP205 - 75

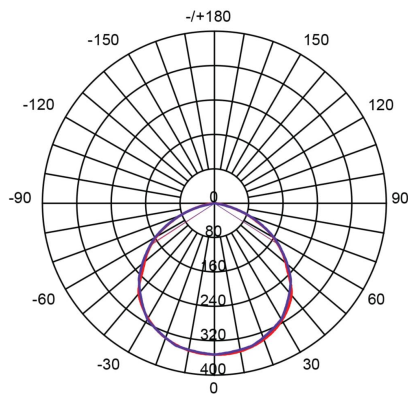

SHP205 - 150

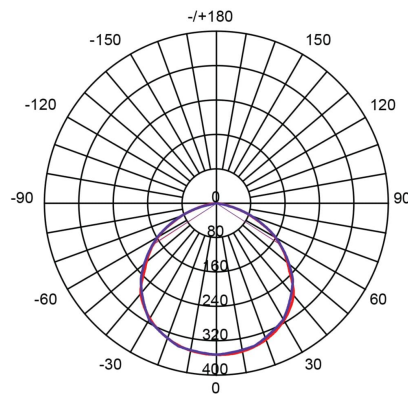

SHP 205 - 110

