



## BLADE SL9707TC - 20/35W

LED low profile batten with selectable colour temperature

### Application

Conventional LED profile battens for commercial service spaces

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K, 4000K, 5700K
- Extruded aluminium body with plastic end cap with a rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 20 or 35 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI> 80, 120 degree beam



- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

### Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SL9707/60TC	240	20	1800/1900/1850	3000/4000/5700	80	110
SL9707/120TC	240	35	3300/3500/3400	3000/4000/5700	80	110

### Technical Specification

Model No.	Dim (mm)	Body Colour	iPART
SL9707/60TC	597(L) x 80(W) x 35(H)	WHITE	YES
SL9707/120TC	1197(L) x 80(W) x 35(H)	WHITE	YES


**IMPORTANT**, where CCT selection switching is provided, it is important to switch OFF the SUPPLY before the CCT selection is made, otherwise equipment damage may occur.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

**SL9707/60TC at 3000K**

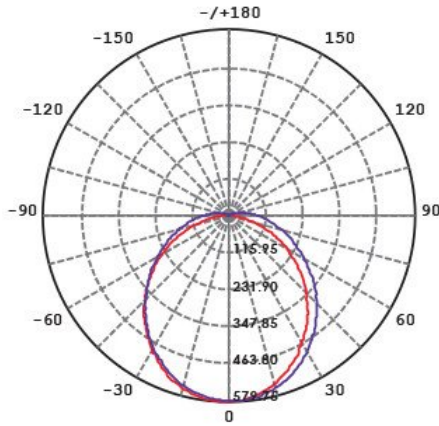

**SL9707/120TC at 5700K**

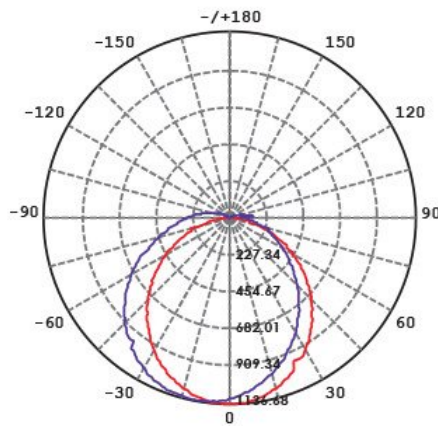

## Product Images

