


DULAR


DULAR-ADJ-TRI

SAP CODE: 2001856

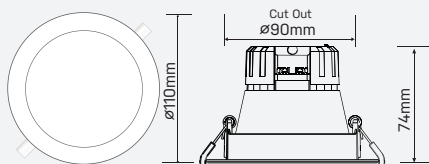

9W, dimmable,
switchable colour
temperature, adjustable

Adjustable LED downlight with
recessed lens to minimise
glare


 Photometric
Diagram

 Unit: cd
 - C0/180 45.0deg
 - C90/270 45.0deg

KEY INFORMATION

| | |
|-------------------------|--------------------|
| Lumen Output | 940 / 980 / 920lm |
| Input Power | 9W |
| Hole Cutout Size | Ø90mm |
| Install | RECESSED |
| Dimming Options | *Phase-Cut Dimming |
| Fitting Colour | WHITE |
| Warranty | 5yr |
| IP Rating | IP20 |
| IK Rating | N/A |
| IC Rating | IC |
| Rebate Scheme Approvals | Pending Approval |

PHOTOMETRIC

| | |
|------------|---------------------|
| Efficacy | 104 / 109 / 103lm/W |
| LED | SMD |
| CCT | 3000 / 4200 / 5700K |
| CRI | >80 |
| Beam Angle | 45° |

ELECTRICAL

| | |
|-----------------------------|-------------------|
| Driver | Integral |
| Supply Input | 220-240V, 50/60Hz |
| Driver Output Voltage | 75V DC |
| Power Factor | >0.9 |
| LED Input Current (nominal) | 120mA |
| Useful life @Ta25° (L70) | 35,000hr |

CONSTRUCTION

| | |
|---------------------------|---------------------------|
| Housing | Aluminium + Polycarbonate |
| Optics | Polycarbonate Diffuser |
| Adjustable Angle | 0-30° |
| Fixings/Hardware | Metal Clip |
| Connection Type | 1m Flex & Plug |
| Total Weight | 0.25kg |
| Dimensions | Ø110 x 74.2mm |
| Operating Ambient Temp. | -20 to 45°C |
| Electrical Classification | Class 2 |

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.