


PRODUCT DATASHEET

VALUE CEILING 10 W 6500 K GEN3

LED VALUE OYSTER | Wall and ceiling luminaires

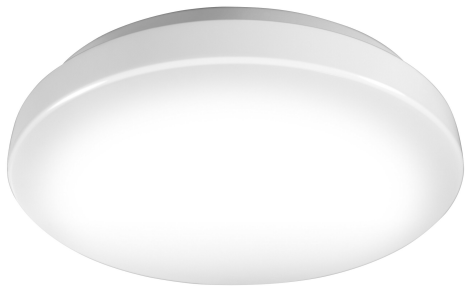

Areas of application

- Corridors
- Entrances / Hallways

Product benefits

- Direct connection to AC power supply thanks to integrated control gear
- Long lifetime thanks to LED technology
- Mercury-free technology
- Uniform room illumination

Product features

- Beam angle: 120°
- Color rendering index $R_a \geq 80$
- Available with color temperature: 3,000 K, 4,000 K, 6,500 K



TECHNICAL DATA

Electrical data


Nominal wattage	10.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	> 0.50
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	800 lm
Luminous efficacy	80 lm/W
Color temperature	6500 K
Light color (designation)	Daylight
Color rendering index Ra	≥ 80
Standard deviation of color matching	6 sdc _m
Beam angle	120 °

Dimensions & Weight

Diameter	250.00 mm
Height	65.00 mm
Product weight	320.00 g



Materials & Colors

Product color	White
Housing color	White
Body material	Polymethylmethacrylate (PMMA)

Cover material	Polymethylmethacrylate (PMMA)
Mercury content	0.0 mg



Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+70 °C
Type of connection	Terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting type	Surface
Mounting location	Ceiling
LED module replaceable	Not replaceable

Lifespan

Lifespan L70/B50 at 25 °C	15000 h
Number of switching cycles	30000

DOWNLOAD DATA

DOWNLOAD DATA	
	Tender documents
	IES file (IES)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075330276	Folding box 1	277 mm x 82 mm x 278 mm	481.00 g	6.31 dm ³
4058075330283	Shipping box 5	426 mm x 292 mm x 305 mm	3102.00 g	37.94 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

