

PRODUCT FAMILY DATASHEET

LED VALUE OYSTER

Wall and ceiling luminaires



AREAS OF APPLICATION

- Corridors
- Entrances / Hallways

PRODUCT BENEFITS

- Direct connection to AC power supply thanks to integrated control gear
- Long lifetime thanks to LED technology
- Mercury-free technology
- Uniform room illumination

PRODUCT FEATURES

- Beam angle: 120°
- Color rendering index $R_a \geq 80$
- Available with color temperature: 3,000 K, 4,000 K, 6,500 K



TECHNICAL DATA


Product description	Electrical data			Photometrical data			Light technical data	Dimensions & weight			Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Diameter	Height	Product weight	Body material
VALUE CEILING 10 W 3000 K GEN3	10.00 W	220...240 V	50/60 Hz	760 lm	Warm White	≥80	120 ° ¹⁾	250.0 mm	65.0 mm	320.00 g	Polymethylmethacrylate (PMMA)
VALUE CEILING 10 W 4000 K GEN3	10.00 W	220...240 V	50/60 Hz	800 lm	Cool White	≥80	120 ° ¹⁾	250.0 mm	65.0 mm	320.00 g	Polymethylmethacrylate (PMMA)
VALUE CEILING 10 W 6500 K GEN3	10.00 W	220...240 V	50/60 Hz	800 lm	Daylight	≥80	120 ° ¹⁾	250.0 mm	65.0 mm	320.00 g	Polymethylmethacrylate (PMMA)
VALUE CEILING 20 W 3000 K GEN3	20.00 W	220...240 V	50/60 Hz	1520 lm	Warm White	≥80	120 ° ¹⁾	330.0 mm	65.0 mm	470.00 g	Polymethylmethacrylate (PMMA)
VALUE CEILING 20 W 4000 K GEN3	20.00 W	220...240 V	50/60 Hz	1600 lm	Cool White	≥80	120 ° ¹⁾	330.0 mm	65.0 mm	470.00 g	Polymethylmethacrylate (PMMA)
VALUE CEILING 20 W 6500 K GEN3	20.00 W	220...240 V	50/60 Hz	1600 lm	Daylight	≥80	120 ° ¹⁾	330.0 mm	65.0 mm	470.00 g	Polymethylmethacrylate (PMMA)

Product description	Product color	Housing color	Cover material	Temperatures & operating conditions	Lifespan	Lifespan L70/B50 at 25 °C	Capabilities	
				Ambient temperature range	Number of switching cycles		Dimmable	Type of connection
VALUE CEILING 10 W 3000 K GEN3	White	White	Polymethylmethacrylate (PMMA)	-20...+40 °C	30000	15000 h	No	Terminal
VALUE CEILING 10 W 4000 K GEN3	White	White	Polymethylmethacrylate (PMMA)	-20...+40 °C	30000	15000 h	No	Terminal
VALUE CEILING 10 W 6500 K GEN3	White	White	Polymethylmethacrylate (PMMA)	-20...+40 °C	30000	15000 h	No	Terminal
VALUE CEILING 20 W 3000 K GEN3	White	White	Polymethylmethacrylate (PMMA)	-20...+40 °C	30000	15000 h	No	Terminal
VALUE CEILING 20 W 4000 K GEN3	White	White	Polymethylmethacrylate (PMMA)	-20...+40 °C	30000	15000 h	No	Terminal

Product description	Product color	Housing color	Cover material	Temperatures & operating conditions	Lifespan	Capabilities		
				Ambient temperature range	Number of switching cycles	Lifespan L70/B50 at 25 °C	Dimmable	Type of connection
VALUE CEILING 20 W 6500 K GEN3	White	White	Polymethylmethacrylate (PMMA)	-20...+40 °C	30000	15000 h	No	Terminal

Product description	Certificates & standards		Logistical data
	Protection class	Type of protection	Temperature range at storage
VALUE CEILING 10 W 3000 K GEN3	I	IP20	-20...+70 °C
VALUE CEILING 10 W 4000 K GEN3	I	IP20	-20...+70 °C
VALUE CEILING 10 W 6500 K GEN3	I	IP20	-20...+70 °C
VALUE CEILING 20 W 3000 K GEN3	I	IP20	-20...+70 °C
VALUE CEILING 20 W 4000 K GEN3	I	IP20	-20...+70 °C
VALUE CEILING 20 W 6500 K GEN3	I	IP20	-20...+70 °C

¹⁾ ZMP_110132

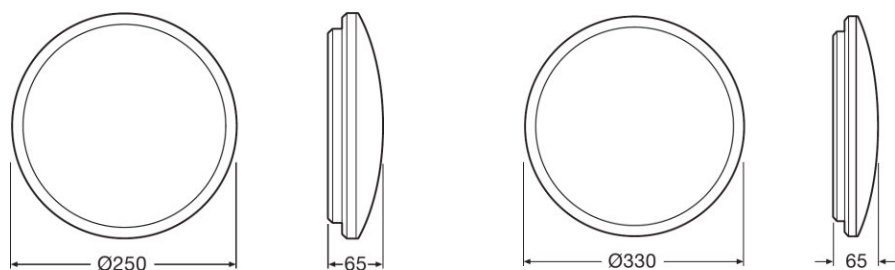

VALUE CEILING 10 W 3000 K GEN3,
 VALUE CEILING 10 W 4000 K GEN3,
 VALUE CEILING 10 W 6500 K GEN3

VALUE CEILING 20 W 3000 K GEN3,
 VALUE CEILING 20 W 4000 K GEN3,
 VALUE CEILING 20 W 6500 K GEN3

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075330245	Shipping carton box 5	426 mm x 292 mm x 305 mm	3102.00 g	37.94 dm ³
4058075330269	Shipping carton box 5	426 mm x 292 mm x 305 mm	3102.00 g	37.94 dm ³
4058075330283	Shipping carton box 5	426 mm x 292 mm x 305 mm	3102.00 g	37.94 dm ³
4058075330306	Shipping carton box 5	451 mm x 373 mm x 385 mm	4972.00 g	64.77 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075330320	Shipping carton box 5	451 mm x 373 mm x 385 mm	4972.00 g	64.77 dm ³
4058075330344	Shipping carton box 5	451 mm x 373 mm x 385 mm	4972.00 g	64.77 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.