

LIFELIGHT



LED Recessed Emergency Light

The Lifelight provides a D40 emergency classification in a sleek architectural design. With market-leading lithium battery technology and energy efficient LEDs the Lifelight will deliver lower maintenance and energy costs.

As the first LED emergency light on the market, the Lifelight continues to lead the way in a variety of emergency lighting applications.



Applications

- | | |
|---|--|
|  Office Buildings |  Apartments |
|  Schools |  Retail outlets |

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- 145mm adaptor plate for retrofitting
- Low Power consumption
- Spring clips for easy installation
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours available on request



LIFELIGHT

| ORDERING INFORMATION | | EL | LP | L10 |
|---------------------------------------|-----------------------------------|---------------------|---------------|------------|
| PART NO. | Standard - White | ELIFE-X-LI | CLIFE | LLIFE |
| | Standard - Black | - | CLIFE-BLK | LLIFE-BLK |
| | Clevertest Plus System Compatible | No | Yes | Yes |
| | DALI | - | CLIFE-DALI | LLIFE-DALI |
| | Zoneworks® XT Hive | - | CLIFE-HV | LLIFE-HV |
| Carton Quantity | | 10 pieces | | |
| Weight - single (carton) | | 0.5kg (8.2kg) | 0.8kg (9.7kg) | |
| Dimensions (L x W x H) - Control Pack | | 232mm x 51mm x 42mm | | |
| Dimensions - Head Diameter | | 95mm | | |
| Dimensions - Adaptor plate | | 145mm | | |
| Ceiling hole cut-out | | 85mm | | |
| Minimum Ceiling Depth | | 120mm | | |

| POWER, LAMPS AND BATTERY | | EL | LP | L10 |
|-----------------------------------|--|--|----------------|------------------------|
| Power Consumption (Standby / Max) | | 0.4W / 1.3W | 1.0W / 3.9W | 1.3W / 3.0W |
| Lamp(s) | | 1 x LED | | |
| Battery | | Lithium Iron Phosphate | | Lithium Nanophosphate® |
| Voltage (V) / Capacity (mAh) | | 3.2V / 3000mAh | 3.2V / 3200mAh | 3.3V / 2500mAh |
| Charging Method | | Intelligent Current Limited Constant Voltage | | |


| TECHNICAL SPECIFICATIONS | | SPARE PARTS | | | |
|----------------------------|-----------------|-------------------------|---------|---------|---------|
| | | EL | LP | L10 | |
| Operating Mode | Non-Maintained | Battery | 1560150 | 1550010 | 1530010 |
| Voltage (V) Frequency (Hz) | 220-240V (50Hz) | DALI Node | N/A | 8003060 | 8003060 |
| Operating Temperature | 1°C to 40°C | Zoneworks® XT Hive Node | N/A | 8003190 | 8003190 |
| IP Rating (IP) | IP20 | | | | |

| CLASSIFICATION | EL | LP | L10 |
|----------------|-----|-----|-----|
| Co | D40 | D40 | D40 |
| C90 | D40 | D40 | D40 |

| SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX) | | | | | | | | | | | | | | |
|--|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| Classification | 2.1m | 2.4m | 2.7m | 3.0m | 3.3m | 3.6m | 4.0m | 4.5m | 5.0m | 6.0m | 7.0m | 8.0m | 9.0m | 10.0m |
| D40 | 11.5 | 13.2 | 14.8 | 16.5 | 18.1 | 19.5 | 20.1 | 20.7 | 21.2 | 22.1 | 22.6 | 23 | 23.1 | 23 |

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

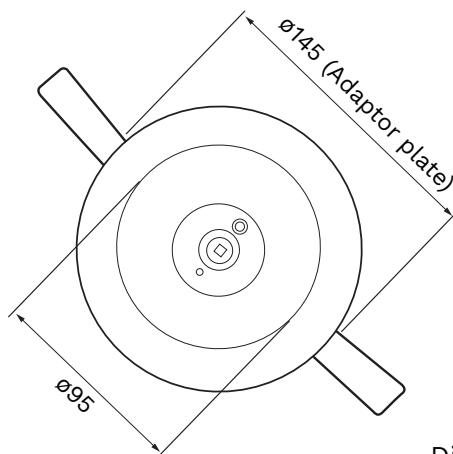

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
 All features and specifications are subject to change without prior notice.
 CT-BRO-ANZ-LIFELIGHT-REC-EM-001

