

PRODUCT FAMILY DATASHEET

LED VALUE TRI COLOUR BATTEN

LED batten luminaires with slide switch for adjusting one of selectable light colors



AREAS OF APPLICATION

- Offices
- Residential interiors
- Office areas
- Hotels, restaurants, shops

PRODUCT BENEFITS

- Homogenous light distribution
- Long lifetime thanks to LED technology
- Easy and quick installation
- Demand based lighting and energy saving thanks to motion and daylight sensor

PRODUCT FEATURES

- Uniform illumination
- Three light colors selectable via slide switch
- Color rendering index $R_a: \geq 80$
- Beam angle: 120°
- Type of protection: IP20
- Protection class: I
- Power factor: > 0.9
- Lifetime: up to 30,000 h




- Wattage adjustment via dip switch (version dependent)

TECHNICAL DATA

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Light color (designation)	Color rendering index Ra	Beam angle	Length	Width	Height	Product weight	Body material
LED Value Batten 600 20 W TRI	20.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	600.0 mm	65.0 mm	65.0 mm	830.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 600 20 W TRI	20.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	600.0 mm	65.0 mm	65.0 mm	830.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 600 20 W TRI MS	20.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	600.0 mm	65.0 mm	65.0 mm	855.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 1500 50 W TRI	50.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	1450 mm	65.0 mm	65.0 mm	1815.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 1200 40 W TRI	40.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	1135 mm	65.0 mm	65.0 mm	1435.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 1200 40 W TRI	40.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	1135 mm	65.0 mm	65.0 mm	1435.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 1500 50 W TRI	50.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	1450 mm	65.0 mm	65.0 mm	1815.00 g	Polycarbonate (PC)/Polyvenyl

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Light color (designation)	Color rendering index Ra	Beam angle	Length	Width	Height	Product weight	Body material
LED Value Batten 1500 50 W TRI MS	50.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	1450 mm	65.0 mm	65.0 mm	1980.00 g	Polycarbonate (PC)/Polyvenyl
LED Value Batten 1200 40 W TRI MS	40.00 W	220...240 V	50/60 Hz	Warm White/Cool White/Daylight	≥80	120 °	1135 mm	65.0 mm	65.0 mm	1510.00 g	Polycarbonate (PC)/Polyvenyl

Product description	Product color	Housing color	Temperatures & operating conditions	Lifespan	Capabilities		Certificates & standards		Logistical data
			Ambient temperature range	Number of switching cycles	Dimmable	Type of connection	Protection class	Type of protection	Temperature range at storage
LED Value Batten 600 20 W TRI	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 600 20 W TRI	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 600 20 W TRI MS	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 1500 50 W TRI	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 1200 40 W TRI	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 1200 40 W TRI	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 1500 50 W TRI	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 1500 50 W TRI MS	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C
LED Value Batten 1200 40 W TRI MS	White	White	-20...+40 °C	15000	No	Terminal, 3-Pole (L, N, PE)	I	IP20	-20...+80 °C




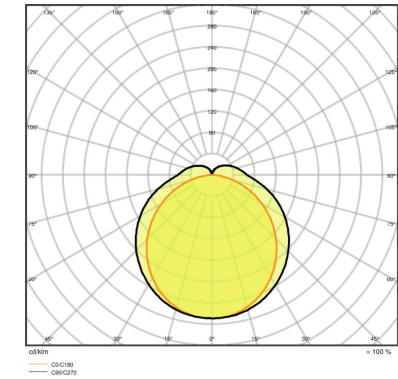


LED Value Batten 600 20 W TRI, LED Value Batten 600 20 W TRI, LED Value Batten 600 20 W TRI MS

LED Value Batten 1500 50 W TRI, LED Value Batten 1500 50 W TRI, LED Value Batten 1500 50 W TRI MS

LED Value Batten 1200 40 W TRI, LED Value Batten 1200 40 W TRI, LED Value Batten 1200 40 W TRI MS

LED Value Batten 600 20 W TRI

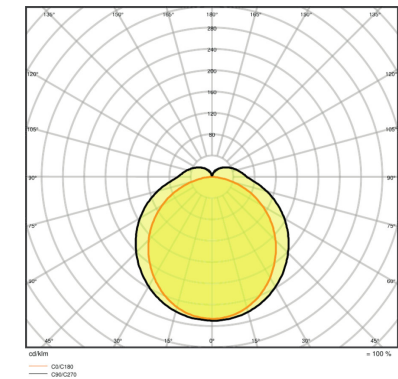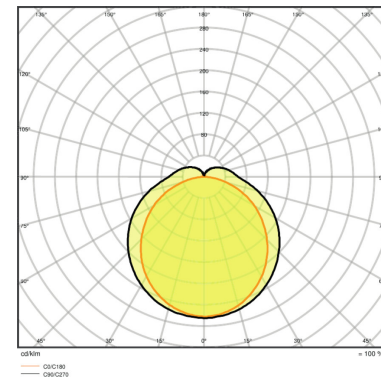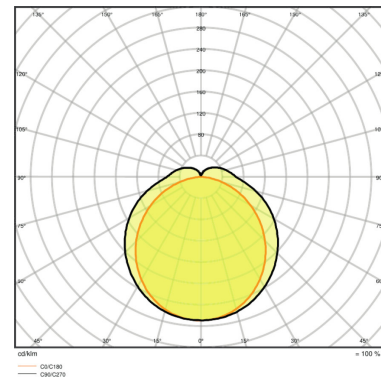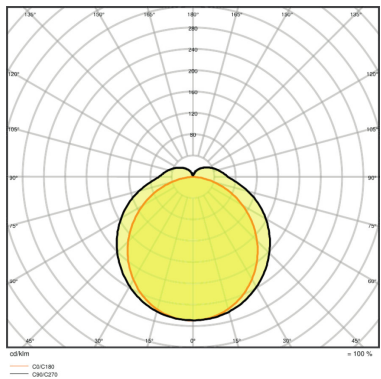


LED Value Batten 600 20 W TRI


LED Value Batten 600 20 W TRI MS

LED Value Batten 1500 50 W TRI


LED Value Batten 1200 40 W TRI

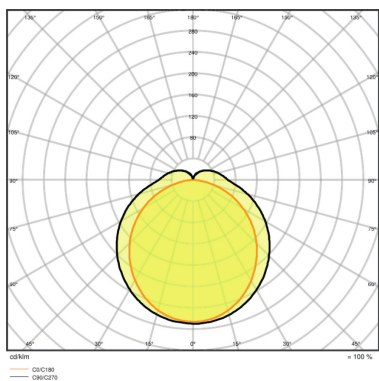


LED Value Batten 1200 40 W TRI

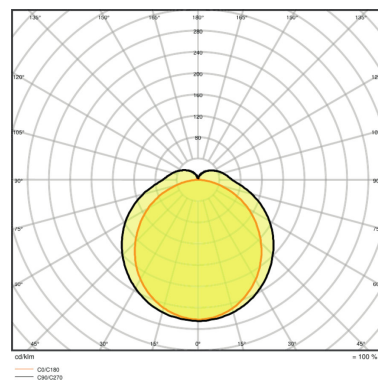

LED Value Batten 1500 50 W TRI

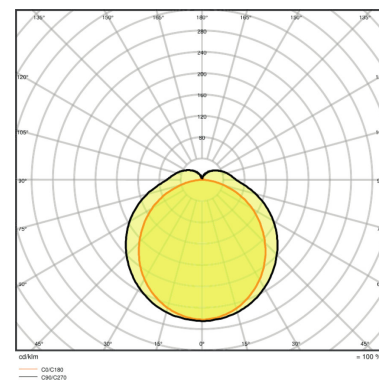

LED Value Batten 1500 50 W TRI MS

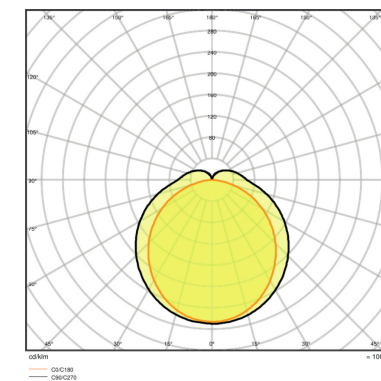

LED Value Batten 1200 40 W TRI MS

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075358416	Shipping carton box 8	625 mm x 195 mm x 375 mm	8612.00 g	45.70 dm ³
4058075358577	Shipping carton box 8	625 mm x 195 mm x 375 mm	8612.00 g	45.70 dm ³
4058075358492	Shipping carton box 8	625 mm x 195 mm x 375 mm	8572.00 g	45.70 dm ³
4058075358478	Shipping carton box 8	1480 mm x 195 mm x 375 mm	18521.00 g	108.23 dm ³
4058075358454	Shipping carton box 8	1162 mm x 195 mm x 375 mm	15059.00 g	84.97 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075358591	Shipping carton box 8	1162 mm x 195 mm x 375 mm	15059.00 g	84.97 dm ³
4058075358614	Shipping carton box 8	1480 mm x 195 mm x 375 mm	18521.00 g	108.23 dm ³
4058075358553	Shipping carton box 8	1480 mm x 195 mm x 375 mm	19561.00 g	108.23 dm ³
4058075358515	Shipping carton box 8	1162 mm x 195 mm x 375 mm	15059.00 g	84.97 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.