


VEGAS LED IP20 12V NON-WATERPROOF FLEXI-STRIP SINGLE COLOUR



4.8W/M, 12V, STANDARD DENSITY, 60LED/M, SMD2835



- VEGAS single colour SMD2835 LED flexi-strip with 3M™ self-adhesive tape
- Low power consumption of 4.8W per meter
- Cutting points every 3 LEDs / 5cm
- Requires 12V LED driver (sold separately)
- Voltage drop of 2.86V per 10m and maximum continuous run of 10m
- For runs over 10m individual lengths should be connected in parallel
- Available in warm white and neutral white
- Easy clip connector packs available as accessories

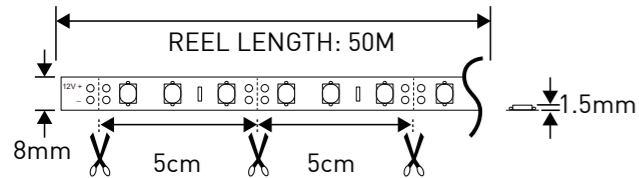

CODE	POWER	VOLTAGE	LUMENS	BEAM ANGLE	COLOUR	CRI	IP	REEL	LIFETIME
RVA48302050	4.8W/m	12V	500LM/m	120°	3000K	80	20	50m	30,000hrs
RVA48402050	4.8W/m	12V	510LM/m	120°	4000K	80	20	50m	30,000hrs


IP20 NON-DIMMABLE DRIVERS COMPATIBILITY LIST

CODE	DESCRIPTION	M PER DRIVER
RVA3012-PSU	VEGAS 30W, 12V, IP20 constant voltage driver, non-dimmable	1m - 6m
RVA6012-PSU	VEGAS 60W, 12V, IP20 constant voltage driver, non-dimmable	7m - 12m
RVA10012-PSU	VEGAS 100W, 12V, IP20 constant voltage driver, non-dimmable	13m - 20m
RVA18012-PSU	VEGAS 180W, 12V, IP20 constant voltage driver, non-dimmable	21m - 37m

IP20 DIMMABLE DRIVERS COMPATIBILITY LIST

CODE	DESCRIPTION	M PER DRIVER
RVA3012DU-PSU	VEGAS 30W, 12V, IP20 driver, triac dimmable	1m - 6m
RVA5012DU-PSU	VEGAS 50W, 12V, IP20 driver, triac dimmable	7m - 10m
RVA7512DU-PSU	VEGAS 75W, 12V, IP20 driver, triac dimmable	11m - 15m

LED FLEXI-STRIP CLIP CONNECTORS

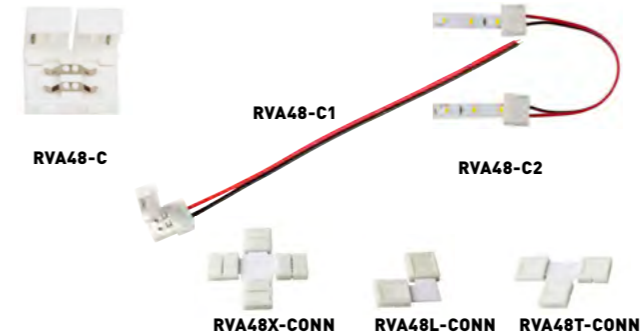

- RVA48-C** - STRIP-TO-STRIP CONNECTOR WITHOUT WIRES
- RVA48-C1** - STRIP-TO-DRIVER CONNECTOR WITH 150MM WIRE
- RVA48-C2** - STRIP-TO-STRIP CONNECTOR WITH 150MM WIRE
- RVA48X-CONN** - "X" EASY CLIP CONNECTOR
- RVA48T-CONN** - "T" EASY CLIP CONNECTOR
- RVA48L-CONN** - "L" EASY CLIP CONNECTOR

IP20 DRIVERS [PAGE 52](#)

AMPLIFIERS & CONTROLLERS [PAGE 46](#)

EXTRUSIONS [PAGE 60](#)