



FRISBEE SL2104TC - 8W/25W

Low profile, recessed or surface mount oyster with selectable CCT and dual power, IP44.

Application

A creative design for residential or commercial spaces

Design Specifications

- Low profile design, ceiling mount
- Durable white polyamide body profile with an opal polycarbonate diffuser
- High efficiency LED optics, with selectable CCT 3000K/4000K/6000K
- Integral non-dimmable driver with a choice of selectable power 8/12W, 12/18W, 18/25W
- Flexible cut-out sizes to suit retrofit recessed applications - SL2104/18TC 80-100mm, SL2104/22TC 120-200mm, SL2104/30TC 150-270mm
- Double insulated



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	SL2104/18TC/DP	240	8/12	780/840/840	3000/4000/6000	80
	SL2104/22TC/DP	240	12/18	1260/1350/1350	3000/4000/6000	80
	SL2104/30TC/DP	240	18/25	1875/2000/2000	3000/4000/6000	80


Beam Angle (°)	Body Colour	Diameter (mm)	Dim (mm)	Mass (kg)
110	WHITE	180	21(H)	0.26
110	WHITE	220	21(H)	0.35
110	WHITE	300	25(H)	0.68

Lumens (lm) shown are at full power setting


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions


SL2104/18TC/DP

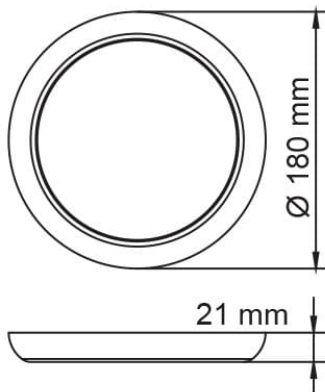

SL2104/22TC/DP

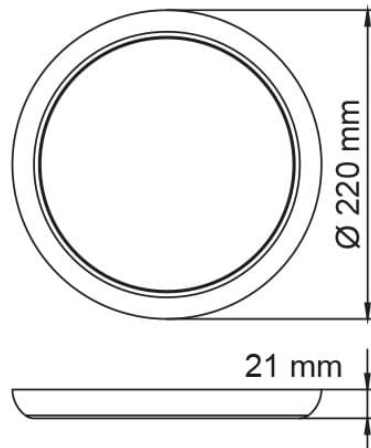


SL2104/30TC/DP

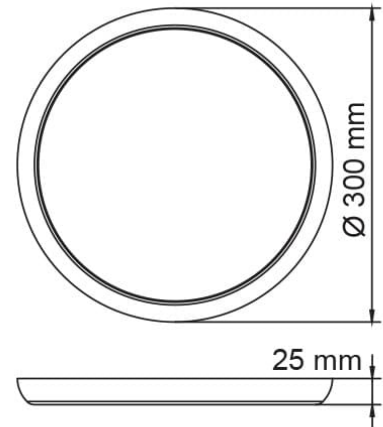

Photometric Data

Unit: cd C0/C180 — C90/C270

SL2104/18TC at 4000K



SL2104/30TC at 6000K

