

Bi-metal CLIC II hole saw Ø 22 mm



Characteristics

- Ø (mm) : **22**
- Depth of cut (mm) : **44**
- Steel (tr/min) : **580-300**
- Stainless steel (tr/min) : **300-175**
- Recommended speed in wood and PVC (tr/min) : **3000-2500**

Materials

- ☑ Metal
- ☑ Wood
- ☑ Plasterboard
- ☑ Stainless steel

GENERAL INFORMATION

Description

Supplied without arbor or pilot drill.

Technical details

Material: HSS steel with 8% cobalt.
Teeth per inch: 4/6.

Advice

Do not use with hammer mode.

Application(s)

Ideally suited for steel, cast iron, aluminium (alloyed and non alloyed), non-ferrous metals, gypsum board, as well as natural and hard wood.


Instructions

1. To be fitted onto a hole saw shank CLIC II BIZ 780 150 or BIZ 780 151.

ADDITIONAL INFORMATION

Hardness: 65-67 HRC.
Diameter and speed of use on next page.

ACCESSORIES

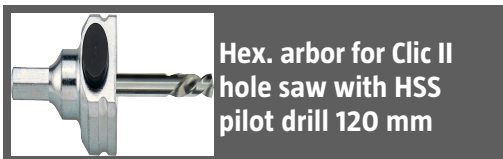

LOGISTIC INFORMATION

Packaging

Blister package

- Height (cm) : 16.6
- Length (cm) : 5.2
- Depth (cm) : 5.2
- Net weight (kg) : 0.07
- Gross weight (kg) : 0.08



Outer package 1

Carton box

- Height (cm) : 18
- Length (cm) : 20.7
- Depth (cm) : 13.2
- Net weight (kg) : 0.50
- Gross weight (kg) : 0.59



Outer package 2

Carton box

- Height (cm) : 40
- Length (cm) : 60
- Depth (cm) : 40
- Net weight (kg) : 4.82
- Gross weight (kg) : 6.55



Outer package 3

Pallet

- Height (cm) : 135
- Length (cm) : 120
- Depth (cm) : 80
- Net weight (kg) : 57.89
- Gross weight (kg) : 88.58

