

**Bi-metal CLIC II hole saw Ø 25 mm**



**Characteristics**

Ø (mm) : **25**  
 Depth of cut (mm) : **44**  
 Steel (tr/min) : **580-300**  
 Stainless steel (tr/min) : **300-175**  
 Recommended speed in wood and PVC (tr/min) : **3000-2500**

**Materials**

- ☑ Metal
- ☑ Wood
- ☑ Plasterboard
- ☑ Stainless steel

**GENERAL INFORMATION**

**Description**

Supplied without arbor or pilot drill.

**Technical details**

Material: HSS steel with 8% cobalt.  
 Teeth per inch: 4/6.

**Advice**

Do not use with hammer mode.

**Application(s)**

Ideally suited for steel, cast iron, aluminium (alloyed and non alloyed), non-ferrous metals, gypsum board, as well as natural and hard wood.


**Instructions**

1. To be fitted onto a hole saw shank CLIC II BIZ 780 150 or BIZ 780 151.

**ADDITIONAL INFORMATION**

Hardness: 65-67 HRC.  
 Diameter and speed of use on next page.

**ACCESSORIES**

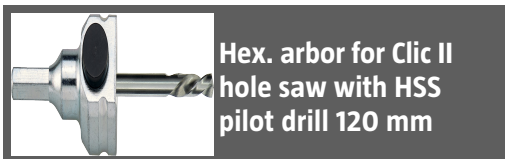

**LOGISTIC INFORMATION**

**Packaging**



**Blister package**

Height (cm) : 16.6  
 Length (cm) : 6.7  
 Depth (cm) : 5.2  
 Net weight (kg) : 0.08  
 Gross weight (kg) : 0.1



**Outer package 1**



**Carton box**

Height (cm) : 18  
 Length (cm) : 20.7  
 Depth (cm) : 13.2  
 Net weight (kg) : 0.6  
 Gross weight (kg) : 0.69



x 6

**Outer package 2**



**Carton box**

Height (cm) : 40  
 Length (cm) : 60  
 Depth (cm) : 40  
 Net weight (kg) : 5.76  
 Gross weight (kg) : 7.7



x 72

**Outer package 3**



**Pallet**

Height (cm) : 135  
 Length (cm) : 120  
 Depth (cm) : 80  
 Net weight (kg) : 69.12  
 Gross weight (kg) : 102.4



x 864