

Pathfinder ECO LED Emergency Light

The affordable and reliable LED emergency light complete with Lithium Iron Phosphate battery. Available in standard and DALI versions.

- High luminous efficacy to maximize spacing. Recessed mount white finish
- Non Maintained Emergency operation Compliant to AS/NZS 2293
- Replaceable Lithium Iron Phosphate (LiFeP04) battery



70

CRI



IP20

Ingress
Protection
Rating



0°C to 40°C
°C

Operating
Temperature



50,000hrs
(L70/B50)

Lifetime



3 Years

Warranty

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	CLASSIFICATION
PFDLED-ECO	3W	339lm	113lm/W	6000K	Ø140 x H34mm	C0/C180:D63 & C90/C270 : D63
PFDLED-ECO-SF	3W	339lm	113lm/W	6000K	L214 x W214 x H60mm	C0/C180:D63 & C90/C270 : D63
PFLED-ECO	2W	217lm	144lm/W	6500K	Ø140 x H34mm	C0/C180:D40 & C90/C270 : D40
PFLED-ECO-SF	2W	217lm	144lm/W	6500K	L214 x W214 x H60mm	C0/C180:D40 & C90/C270 : D40

BATTERY

LiFePO4

BATTERY VOLTAGE

3V

ACCESSORY CODE

PFSKIT-L2

DESCRIPTION

PATHFINDER 2 D80 SURFACEKIT WHITE

FFLEDVK

FFLEDVK CEIL MNT VANDAL KIT

AS/NZS 2293.1:2018 Classification Table



ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)		
	CO	C90/C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	16.5	16.5
3.3	18.1	18.1	18.1
3.6	19.5	19.5	19.5
4	20.1	20.1	20.1
4.5	20.7	20.7	20.7
5	21.2	21.2	21.2
6	22.1	22.1	22.1
7	22.6	22.6	22.6

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)		
	CO	C90/C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	16.5	16.5
3.3	18.1	18.1	18.1
3.6	19.8	19.8	19.8
4	22	22	22
4.5	24.5	24.5	24.5
5	25.2	25.2	25.2
6	26.4	26.4	26.4
7	27.3	27.3	27.3

PFLED-ECO

PFDLED-ECO

Line Drawings

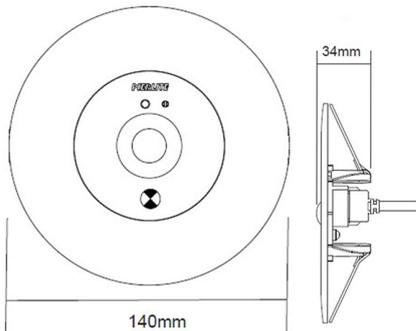

Product Images



PFLED-ECO-SF, PFDLED-ECO-SF



PFLED-ECO-SF, PFDLED-ECO-SF



PFLED-ECO, PFDLED-ECO



PFSKIT-L2