



## LUME3WD63-SM

LUME3WD63-SM  
 SAP CODE: 2001869

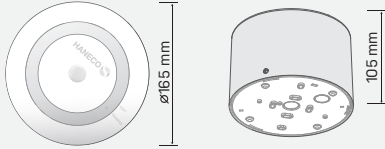

### Non-maintained surface mount LED emergency light

Surface mount Emergency LED light with LiFePO4 battery that delivers 2 hours of light during power failures.



AVERAGE BEAM ANGLE (50%): 156.6 DEG

- C0/180 156.4deg
- C90/270 156.6deg

### QUICK FACTS

- Lithium iron phosphate battery (LiFePO4) compliant with AS2293
- More than 2 hours of emergency light
- Simple test button
- D63 Emergency classification
- Large terminals for easy wiring
- 5 year warranty (4 year battery)

### SPECIFICATIONS

Power	0.5W (Standby) 4W (Max)
IC	IC-4
Battery	LiFePO4 3.2V 3.3Ah
Charge Time	16 Hours
Discharge Duration	> 2 Hours
Emergency Classification	C0/D63 C90/D63
IP Rating	IP40
Test Facility	Manual Test
Operation	Non-Maintained
Lumen Output	340lm
CCT	5700K
CRI	>80
Beam Angle	150°
Fascia Colour	White (Black Also Available)
Installation	Surface Mount
Warranty	5 Years (Battery 4 Years)
Supply Voltage	220-240V a. c.
Supply Frequency	50-60Hz
Cable	1.5m Flex & Plug
Body	Polycarbonate
Diffuser	Polycarbonate (Clear)
Driver	Integral
Weight	0.3Kg
Ambient Temperature	0° - 40°