

DOWNLIGHTS

MIRA 18W/24W and 30W/40W dual wattage CCT4 selectable dimmable LED downlight, 3000K, 4000K, 5000K, 6500K

ROBUS®


This great new downlight has so much more to offer with Dual wattage & all new CCT4 capabilities, clean white powder coated finish ensures looks & appearance in commercial ceiling spaces. C-Bus & Dimmable with selectable CCT's of warm, neutral, cool or daylight white, complete with flex & plug.



Applications:

- Offices & Reception Areas
- Hotel Foyers
- Restaurants & Shops
- Schools & Retirement Homes
- Hospitals

Product Code:	RMR1824CCT4-01		RMR3040CCT4-01	
Wattage	18W	24W	30W	40W
Comparable to:	32W fluorescent	40W fluorescent	58W fluorescent	70W fluorescent
Total Power (W):	18.8/18.4/18.6/18.8	25.2/24.6/24.9/25.3	31.1/30.3/30.5/30.9	41.6/40.6/40.8/41.9
Total Light Output (lm):	1,760/1,940/2,000/1,980	2,250/2,540/2,610/2,540	3,340/3,520/3,530/3,450	4,260/4,570/4,570/4,410
Efficacy (lm / cctW):	94/106/108/105	89/103/105/100	107/116/116/112	102/112/112/106
Beam Angle (deg):	110		110	
CCT (K):	3,000/4,000/5,000/6,500		3,000/4,000/5,000/6,500	
CRI (Ra):	85		85	
Rated Life (hrs):	35,000		35,000	
Warranty (yrs):	3		3	
Ingress Protection (IP):	44		44	
IC - Rating	IC-4		CA90	
Impact Rating (IK):	07		07	
Operating Temperature (°C):	-20 ≤ Ta ≤ +40		-20 ≤ Ta ≤ +40	
Operating Voltage (Vac):	220-240		220-240	
Power Factor (PF):	0.95		0.95	
Diameter (mm):	227		227	
Cut Out (mm):	190		190	
Depth (mm):	45		45	
Weight (kg):	0.97		1.01	

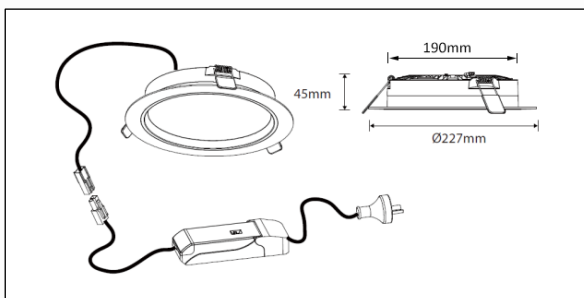

Construction:


Die Cast aluminium body with Polycarbonate diffuser

Accessories:

- RMP280TRIM-01** 280mm Extension Trim Accessory
RMP5MK-01 Surface Mount Can



Cone Illuminance Diagram:

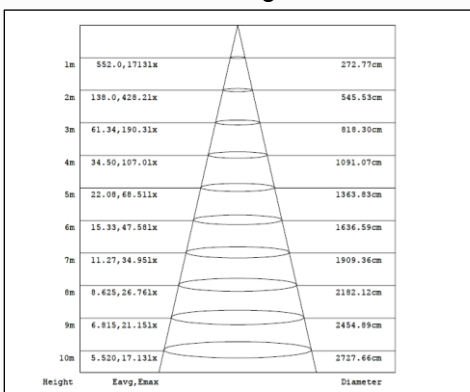

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE


IRE: TEL: +353 1 709 9000 WEB: WWW.ROBUS.COM
 AUS: TEL: +61 7 3890 5444 WEB: WWW.ROBUS.COM.AU

Diagram for RMR3040CCT4-01 in 5,000K. Other diagrams available on request

Standards & Approvals:

Complies with: SAA, AS/NZS 60598, IEC 55015, CISPR 15, IEC 61000, IEC 62493, IEC 61547, IEC 62471, RCM

Polar Intensity Diagram:

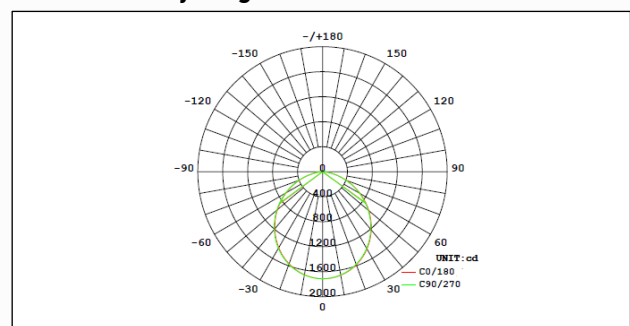

LED GROUP EUROPE · AUSTRALIA · ASIA · MIDDLE EAST · AFRICA

Diagram for RMR3040CCT4-01 in 5,000K. Other diagrams available on request