



LED module with integrated LED 24 V AC/DC, red, screw terminal, for front plate mounting, Minimum order quantity 5 or a multiple thereof

product brand name	SIRIUS ACT
product designation	LED module
product type designation	3SU1
General technical data	
product component	
• diode	Yes
• lamp transformer	No
• light source	Yes
• series resistor	No
insulation voltage rated value	320 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
• for actuation	AC/DC
surge voltage resistance rated value	4 kV
consumed current maximum	25 mA
protection class IP	
• of the enclosure	IP40
• of the terminal	IP20
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
• for railway applications according to EN 61373	Category 1, Class B
vibration resistance	
• according to IEC 60068-2-6	10 ... 500 Hz: 5g
• for railway applications according to EN 61373	Category 1, Class B
operating period typical	100 000 h
reference code according to IEC 81346-2	P
Substance Prohibitance (Date)	10/01/2014
SVHC substance name	Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5
Weight	8 g
operating voltage 1	
• at AC	
— at 50 Hz rated value	24 V
— at 60 Hz rated value	24 V
• at DC rated value	24 V
relative positive tolerance of the operating voltage	20 %
relative negative tolerance of the operating voltage	20 %

Control circuit/ Control			
inrush current maximum	2 A		
Connections/ Terminals			
type of electrical connection	screw terminal		
type of connectable conductor cross-sections	• solid with core end processing2x (0.5 ... 0.75 mm²) • solid without core end processing2x (1.0 ... 1.5 mm²) • finely stranded with core end processing2x (0.5 ... 1.5 mm²) • finely stranded without core end processing2x (1,0 ... 1,5 mm²) • for AWG cables2x (18 ... 14)		
• solid with core end processing			
• solid without core end processing			
• finely stranded with core end processing			
• finely stranded without core end processing			
• for AWG cables			
connectable conductor cross-section finely stranded with core end processing	0.5 ... 1.5 mm²		
tightening torque with screw-type terminals	0.8 ... 0.9 N·m		
Lamp			
type of light source	LED		
color of the light source	red		
light intensity	450 ... 1 120 mcd		
ATEX			
certificate of suitability	• ATEXNo • IECExNo		
• ATEX			
• IECEx			
Ambient conditions			
ambient temperature	• during operation-25 ... +70 °C • during storage-40 ... +80 °C		
• during operation			
• during storage			
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)		
Environmental footprint			
Environmental Product Declaration(EPD)	Yes		
global warming potential [CO2 eq] total	0.787 kg		
global warming potential [CO2 eq] during manufacturing	0.566 kg		
global warming potential [CO2 eq] during operation	0.235 kg		
global warming potential [CO2 eq] after end of life	-0.015 kg		
Siemens Eco Profile (SEP)	Siemens EcoTech		
Installation/ mounting/ dimensions			
fastening method	• of modules and accessoriesFront plate mounting		
• of modules and accessories			
height	33.2 mm		
width	9.8 mm		
depth	29.4 mm		
Approvals Certificates			
General Product Approval		EMV	Test Certificates



[Type Test Certificates/Test Report](#)

Test Certificates	other	Environment
-------------------	-------	-------------

[Special Test Certificate](#)

[Confirmation](#)



[Environmental Confirmations](#)

Further information

Information on the packaging


<https://support.industry.siemens.com/cs/ww/en/view/109813875>


Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BB20-1AA0>

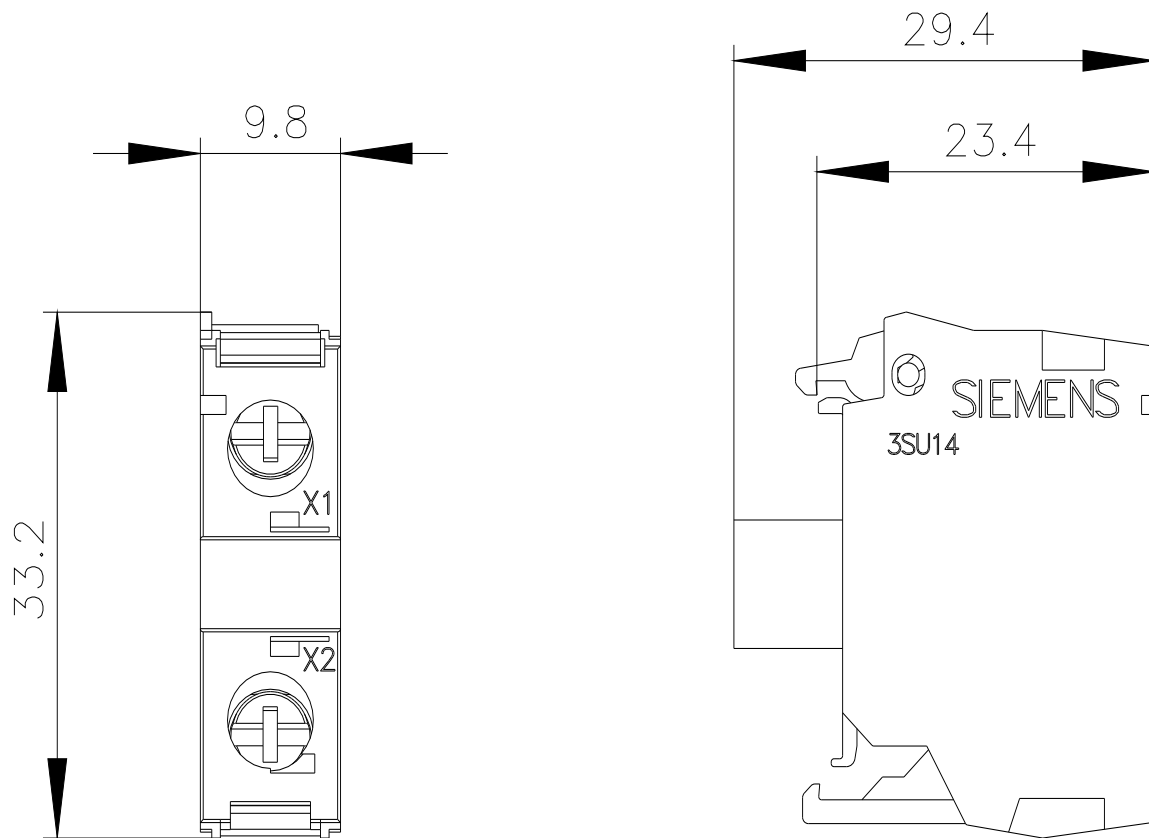

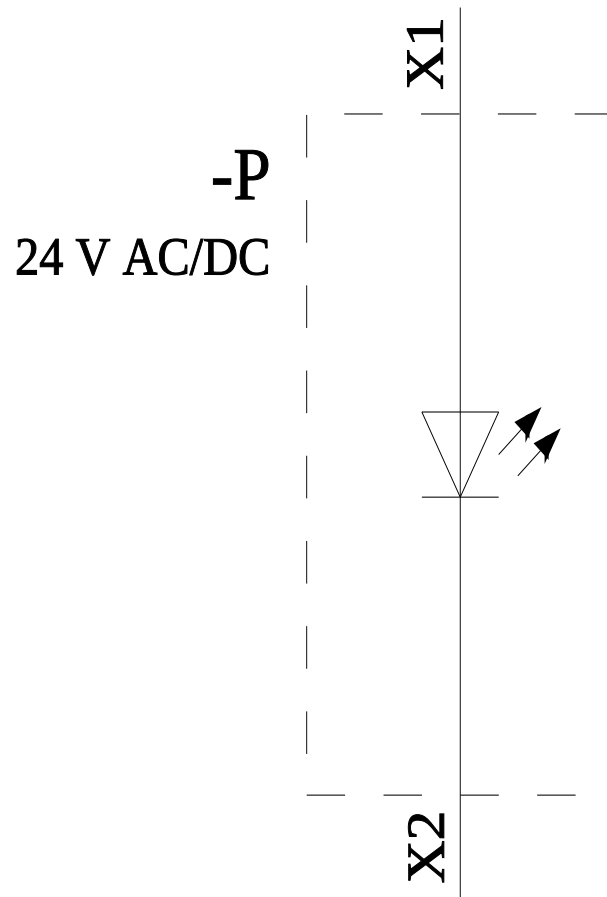

last modified:

4/2/2025 