



CUBE II S9320 - 10W

10 watt LED surface mount CUBE profile wall luminaire, IP65

Application

Ideal for any residential or commercial interior or exterior space

Design Specifications

- Durable aluminium body profile
- Powder coat finish, colour black or white
- High efficiency LED optics
- CCT choice of 3000K / 5000K
- Independent up & down beam, adjustable from 10° to 60°
- Integral non-dimmable LED driver

Performance

- Dimmable - **NO**




Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	S9320WW/WH	240	10	750	3000	80
	S9320WW/BK	240	10	750	3000	80
	S9320NDL/WH	240	10	900	5000	80
	S9320NDL/BK	240	10	900	5000	80

Beam Angle (°)	Dimmable	Dim (mm)	Body Colour
60	NO	120(W) x 100(H) x 97(D)	WHITE
60	NO	120(W) x 100(H) x 97(D)	BLACK
60	NO	120(W) x 100(H) x 97(D)	WHITE
60	NO	120(W) x 100(H) x 97(D)	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

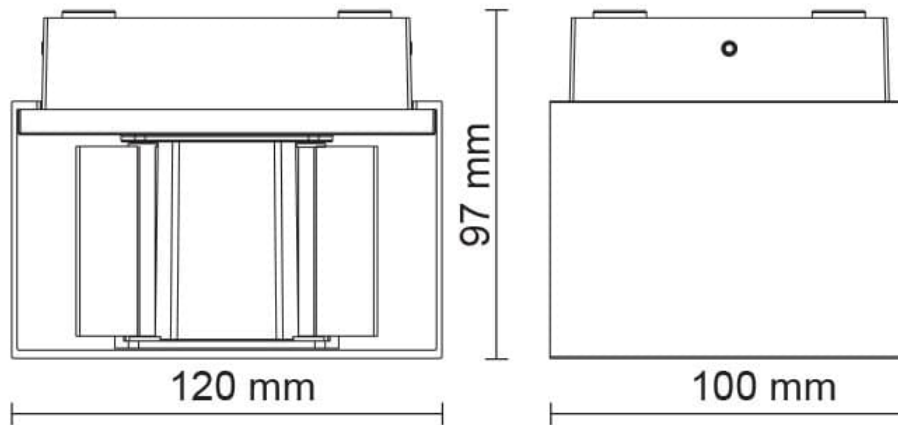

Photometric Data

Unit: cd C0/C180 C30/C210
cd C60/C240 C90/C270

S9320WW at 3000K

