

# OUTDOOR CHASE LED SPOT WALL LIGHT

20W

CCT3

NEW!



## CONSTRUCTION:

- Polycarbonate housing & trim
- Polycarbonate lens covers

## FEATURES:

- COB LED with CCT3 selectable option (3000K/4000K/6000K)
- Fully movable PIR (up-down, right-left) with manual override function
- Lamp rotation angle of 35° horizontal and 60° vertical
- IP54 – Fitting & PIR Sensor
- Deep base for easy wiring and PA12 terminals
- Fast fix male/female base/fitting



WARRANTY



RATED HOURS



LUMENS PER W



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



CCT



TILT ANGLE




ROTATION ANGLE



SAFETY CLASS

## DIMENSIONS(mm)


	Width	Length	Height
RCH20CCT3-01	201	182	148
RCH20CCT3-04	201	182	148
RCH20CCT3P-01	201	183	208
RCH20CCT3P-04	201	183	208

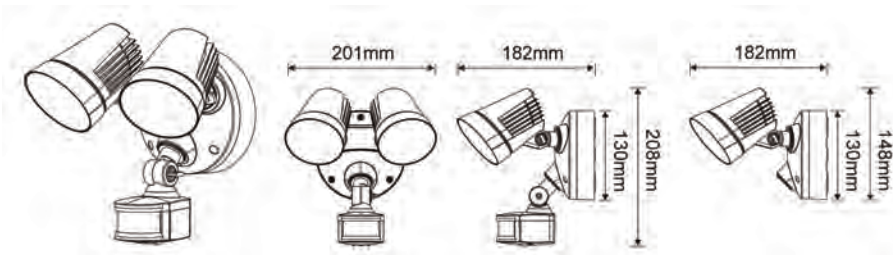

# OUTDOOR CHASE LED SPOT WALL LIGHT



	Standard	PIR
White	<b>RCH20CCT3-01</b>	<b>RCH20CCT3P-01</b>
Black	<b>RCH20CCT3-04</b>	<b>RCH20CCT3P-04</b>
<b>Comparable to (W):</b>	2x70W Halogen	2x70W Halogen
<b>Total Power (W):</b>	19.4/18.7/19.3	19.4/18.7/19.3
<b>Total Light Output (lm):</b>	1,790/2,110/1,960	1,790/2,110/1,960
<b>Efficacy (lm/cctW):</b>	93/113/102	93/113/102
<b>Lux at 1m (lux):</b>	780/870/770	780/870/770
<b>CCT (K):</b>	3000/4000/6000	3000/4000/6000
<b>CRI:</b>	80	80
<b>Power Factor (PF):</b>	0.5	0.5
<b>Box Qty:</b>	1	1
<b>Weight (Kg):</b>	0.59	0.64

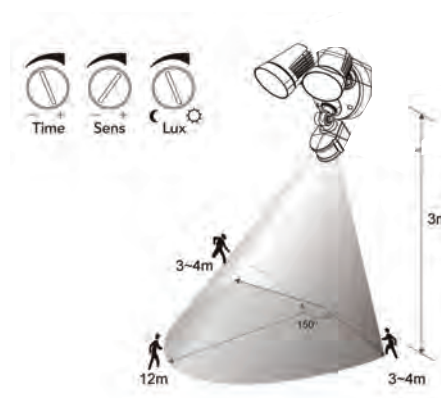

<b>Time Duration:</b>	10s to 10min
<b>Lux Adjustment range:</b>	0 - 2000 Lux
<b>Mounting Height range:</b>	1.5m to 3m
<b>Detection Angle:</b>	7 - 10m Max
<b>Sensor Detection range:</b>	150°
<b>IP:</b>	54