


Connected cable outlet

Cat. No(s): 0 648 47/51/63/79/82/83/98



1. USE


This product is an accessory that necessitate first the installation of a "xxxx" with Netatmo starter pack.
 Can be installed in place of an existing cable outlet in a 40 mm depth wall box.
 Monobloc mechanism (frame + mechanism).
 Fixing with screws.

2. RANGE

Cable outlet delivered complete.
 Equipped with LED indicator (configuration)
 and RESET button (hidden) used to return to factory settings.

White	Titane	Graphite	Alu	Ivory	Black	Pearl
0 648 79	0 648 82	0 648 83	0 648 98	0 648 63	0 648 47	0 648 51

3. DIMENSIONS (mm)

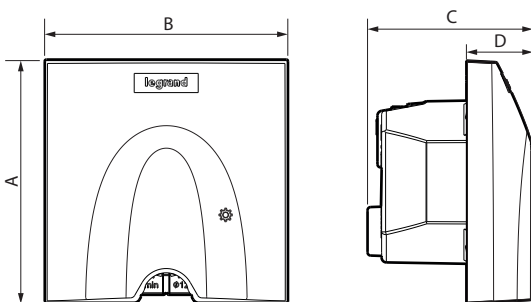

A	B	C	D
76	76	51	20

4. CONNECTION

■ 4.1 Connected cable outlet

Terminal type: with screws
 Terminal capacity: 3 x 2.5 mm²
 Stripping length: 8 mm
 Screwdriver: plat 3 mm
 Recommended rigid cable


■ 4.2 Wiring terminals

Terminal type: with screws
 Terminal capacity: 3 x 2.5 mm² + pilote wire 4/6 orders
 Stripping length: 9 mm
 Screwdriver: flat 3 mm


With cable grips
 For cables: max. Ø 12.5 mm,
 min. Ø 3,7 mm

Authorised cables H05 VVF or H07 RNF

5. FUNCTION



LED indicator:
 - useful during installation



RESET button
 used to return to factory settings

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against impacts: IK 04

Protection against solid bodies and liquids: IP 21

■ 6.2 Material characteristics

Cover plate:

White, Ivory: ABS

Titane, Graphite : ABS + metal

Alu, Black, Pearl: ABS painted satine finish

Mechanism housing: PC

Support: Glass fiber(20%) PC

Halogen-free

UV resistant

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for the other insulating components.

■ 6.3 Electrical characteristics

Voltage: 110/230 V~

Current: 14 A max.

Power: 3000 W max.

Frequency: 50/60 Hz

ZigBee radio technology 2.4 GHz to 2.4835 GHz

Power level: < 100 mW

Range: 200 m of far field

10 m recommended between products indoor

■ 6.4 Climate characteristics

Storage temperature: 0° C to + 45° C

Usage temperature: 5° C to + 45° C

7. CARE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.

The undersigned, LEGRAND, declares that the radio-electric equipment type (0 648 79/82/83/98/63/47/51) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com