



Replacement
Warranty*

**40W TRICOLOUR LED BATTEN LIGHT
WITH MICROWAVE SENSOR**

TLDB34640S



**BUILT IN
MICROWAVE
SENSOR**


This Tricolour LED batten features an energy efficient tubeless design as well as a shatter resistant polycarbonate diffuser and a microwave sensor. Making this batten ideal for use in carparks, garages, security areas, workshops, factories, industrial environments, stairwells, corridors, storage areas, schools and public amenities.

- **Lightweight powder coated aluminium housing**
- **Full fixture LED batten to replace twin fluoro T8 or T5's**
- **Surface mount directly to ceiling without visible brackets**
- **Shatter resistant polycarbonate diffuser**
- **40W Tricolour LED light**
- **Microwave sensor with on/off control**



Tricolour LED	40W 4000 LUMENS	110°-130° Beam Angle	Non Dimmable	IP 20 IP Rating	≥80 CRI	On/Off Control
Hold Time	Daylight Sensor	Detection Area 14m	Built-In Microwave Sensor			

INCLUDES

Main body & screw pack

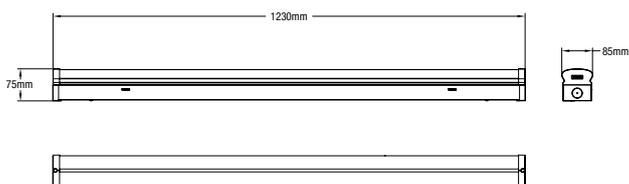

DIMENSIONS

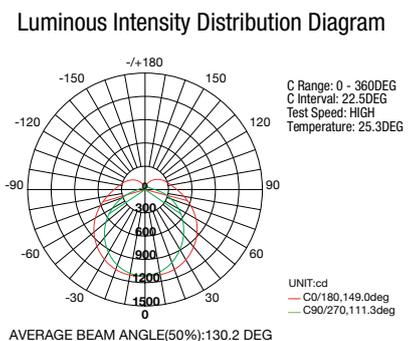

Product No: TLDB34640S AAI Figure at 4000k CCT Product No: TLDB34640S Luminous Intensity Measure at 4000k CCT



**Aust/NZ Approval No.
EESS-190475-0**



9312375506751



TLDB34640S

40W TRICOLOUR LED BATTEN LIGHT WITH MICROWAVE SENSOR

FEATURES

- Surface mounted LED batten light
- Lightweight powder coated aluminium housing
- Shatter resistant polycarbonate diffuser
- Direct mounting (no brackets required)
- Provides excellent light distribution using Tricolour SMD LED technology
- Select either 3000k, 4000k, or 6500k light colour temperature setting
- Includes manual test and indicator light button
- Built in microwave sensor with on/off control, detection area, daylight sensor and hold-time function
- Large terminal block for easy installation

SPECIFICATIONS

Model name	40W Tricolour LED Batten Light 1230mm Microwave Sensor
Model number	TLDB34640S
Power (wattage)	40W
Voltage	220v-240v
Frequency	50Hz
Switchable Tricolour lumens	4000lm max
Colour temperature	3000k / 4000k / 6500k
LED light beam angle	110°-130°
Product size (mm)	1230 x 75 x 85
Material	Shatter resistant polycarbonate diffuser
LED Type	SMD LED
CRI	≥80
Approximate lamp life	30,000hrs
Weather resistance rating	IP20
Operating temperature	-20°C to +40°C
Sensor Hold time	5s / 90s / 5min / 15min
Detection Area	14m ceiling mounted
Daylight threshold	2 lux / 10 lux / 50 lux / disable
Mounting height	Max 6m
Microwave frequency	5.8GHz + 75Mhz



INSTALLATION

Installation	By licensed electrician only
Warranty	2 year replacement warranty*

* For further information regarding warranty terms and conditions, please refer to enclosed warranty statement.

SHIPPING

Packaging size	1276 x 88 x 85mm
Gross weight	9.4kg
Carton qty	4

AVAILABLE IN WHITE



White

Model	Colour	Barcode
TLDB34640S	White	 9312375506751