



Replacement  
Warranty\*

# 12W, 18W, 24W & 28W TRICOLOUR LED CEILING OYSTER LIGHT

Orbit Tricolour LED  
Ceiling Oyster Light

**TRICOLOUR  
3000K 4000K  
5000K**



Tricolour



Non  
Dimmable



CRI



IP  
Rating



Energy  
Efficient



LED  
Lamp Life




LED Type




Beam Angle

- Surface mounted LED ceiling light
- Ideal for kitchens, hallways and high traffic areas
- Provides excellent light distribution using SMD LED technology
- 12W, 18W, 24W & 28W Tricolour LED Light
- Simple & sleek design with a toughened acrylic diffuser

## DIMENSIONS



Wattage	Colour Temperature	Lumens	Size
12W	3000k	900lm	Dia 260mm x 60mm (H)
	4000k	1000lm	
	5000k	950lm	
18W	3000k	1400lm	Dia 300mm x 60mm (H)
	4000k	1600lm	
	5000k	1500lm	
24W	3000k	1700lm	Dia 380mm x 60mm (H)
	4000k	1900lm	
	5000k	1800lm	
28W	3000k	2200lm	Dia 380mm x 60mm (H)
	4000k	2400lm	
	5000k	2300lm	

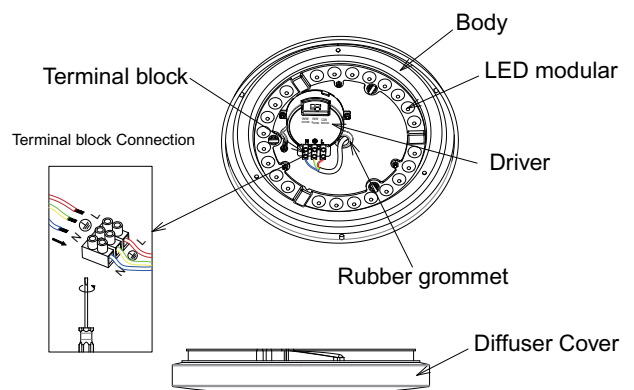

AS/NZS 60598.2.1:2014  
SAA : GMA-507622

## 12W, 18W, 24W & 28W TRICOLOUR LED CEILING OYSTER LIGHT

### FEATURES

- Suitable for residential use
- Steel base with toughened acrylic diffuser
- Surface mounted LED ceiling light
- This luminaire has been designed to the highest standards, it is ideal for residential use
- Fitted with tricolour temperature switch that allows you to control the colour temperature of the light from 3000k, 4000k or 5000k\*  
\*This feature allows you to easily change the colour of the light by easily switching the internal switch between 3000k, 4000k or 5000k colour temperatures.
- Provides a uniform light - output using SMD LED modular technology
- Non dimmable integrated SAA driver
- Not to be used with a dimmer switch
- IP20, indoor use only

### SPECIFICATIONS

<b>Model name</b>	Orbit
<b>Rating power</b>	12W, 18W, 24W & 28W
<b>Input voltage</b>	AC220V-240V
<b>Frequency</b>	50Hz-60Hz
<b>Light type</b>	Tricolour LED
<b>Protection</b>	Class 1 - Requires earth connection.
<b>LED Type</b>	LED modular (non replaceable)
<b>Colour temperature</b>	3000k / 4000k / 5000k
<b>Colour temperature index</b>	>80
<b>Beam angle</b>	120°
<b>IP rating</b>	IP20
<b>Connection type</b>	Terminal block
<b>Lumens</b>	Please refer to chart on previous page for colour temperature/lumen's



12W Illustration only shown for packaging example.

### INSTALLATION

<b>Installation</b>	By licensed electrician only
<b>Warranty</b>	2 year replacement warranty*

\* For Martec warranty statement please refer to the website [www.martecaustralia.com.au](http://www.martecaustralia.com.au)  
Warranty is void unless installed by a licensed electrician.

### SHIPPING

Item No.	Description of Goods	Pcs/Ctn	Carton Dimensions		
			L(cm)	W(cm)	H(cm)
ML0034512	12W	12	64	47	33.5
ML0034518	18W	12	71	47	37
ML0034524	24W	8	62	42	42.5
ML0034528	28W	8	62	42	42.5

### AVAILABLE IN WHITE



Model	Colour	Barcode
ML0034512	White	

Model	Colour	Barcode
ML0034518	White	

Model	Colour	Barcode
ML0034524	White	

Model	Colour	Barcode
ML0034528	White	