

Nipper LED Batten

The NIPPER is an efficient wide base LED linear batten designed in a sealed removable LED module and a white metal back plate with large terminal blocks for ease of installation. The frosted diffuser is made from impact resistant material that produce clean light, ideal for surface mount or suspended installations



- Designed with a wide 130mm width base to easily replace old and energy consuming twin fluorescent battens.
- Flicker free LED driver built-in for increased visual acuity and comfort
- Option for emergency with Lithium Iron Phosphate Battery 2.5w @ 350lumen available

LUMEN^{SELECT} | COLOUR^{SELECT}



80

CRI



IP20

Ingress Protection Rating



5SDCM

MacAdam Steps



0 - 40°C

Operating Temperature



Non - Dimmable

Dimming



54,000hrs (L80/50)

Lifetime



4 Years

Warranty



120°


Beam Angle




Non-IC

IC Rated

CODE	SYSTEM POWER	EXIT LUMEN	LM/W	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	LINE CURRENT
NIPBAT202ECS	18W	1700lm	94lm/W	4000K	L630 x W130 x H74mm	1kg	12A	0.07A
		1900lm	105lm/W	5000K				
		1700lm	94lm/W	6500K				
NIPBAT404ECSLS	36W	3860lm	107lm/W	4000K	L1230 x W130 x H74mm	2kg	20A	0.15A
		4000lm	111lm/W	5000K				
	36W	3630lm	100lm/W	6500K				
	30W	3300lm	110lm/W	4000K				
		3450lm	115lm/W	5000K				
	30W	3160lm	105lm/W	6500K				
	25W	2890lm	115lm/W	4000K				
		2990lm	119lm/W	5000K				
	25W	2740lm	109lm/W	6500K				
	18W	2200lm	122lm/W	4000K				
	18W	2330lm	129lm/W	5000K				
	18W	2160lm	120lm/W	6500K				

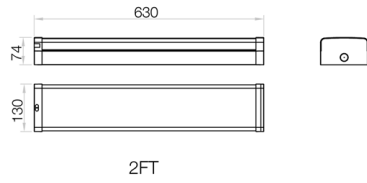

NIPBAT202ECS

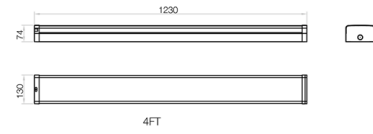

NIPBAT404ECSLS

Product Images



NIPBAT202ECS



NIPBAT404ECSLS