

FEATURES

- ✓ Volume control
- ✓ 32 Tones (user selectable)
- ✓ High sound output
- ✓ Low current consumption
- ✓ Automatic synchronisation
- ✓ Second tone for two stage alarms
- ✓ Lockable base



PRODUCT DESCRIPTION

The ROSHNI is a high specification wall mounting sounder suitable for signaling within open areas or corridors. The rugged low profile casing and encapsulated electronics provide a high level of durability and resistance to environmental conditions.

The wide operating voltage and range of tones make this sounder extremely flexible and adaptable. Additionally, it is compatible with the majority of fire and emergency signaling tones in use throughout the world today.


TECHNICAL SPECIFICATIONS

Voltage	9-15Vdc 18-28Vdc
Current	12mA (Typical tone 3)
Sound output	102dB(A) at 24Vdc (Typical tone 3)
Temperature	-25°C to +70°C
Construction	ABS
IP Rating	Shallow base = IP54 Deep/U base = IP65
Weight	0.24kg (shallow base) 0.25kg (deep/U base)
Tones	32
Colour	Red (shallow also available in white)

RECOMMENDED TONE DIP SWITCH SETTINGS

DIP SW	Tone
00111	IS08201-1 3 x 500ms pulses 970hZ - 1.5s pause - repeat
00110	IS08201-2 3 x 500ms pulses 2850hZ - 1.5s pause - repeat

DIMENSIONS

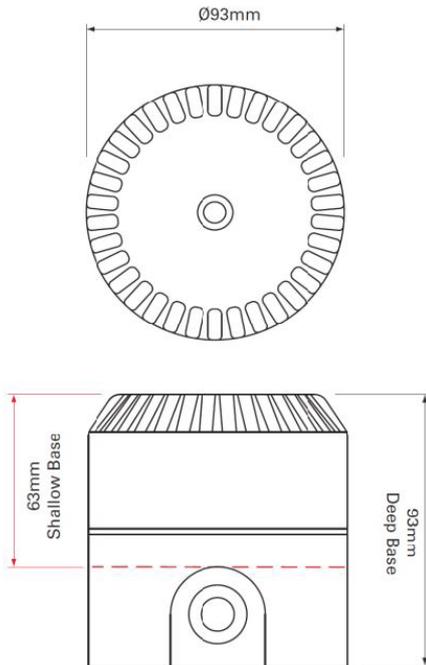

ORDERING INFORMATION

ROSH-D	Roshni red sounder with deep red base
ROSH-S	Roshni red sounder with shallow red base
ROSH-S-WHITE	Roshni white sounder with shallow white base
FULL-W-D-BASE	Separate deep white base for IP65 rating for white Roshni