

ROBUS®

INDUSTRIAL

SONICO LED MULTIBAY

100W / 120W / 150W / 200W
IN ONE






PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Die cast aluminum powder coated housing
- Clear Polycarbonate diffuser
- 2m flex and plug

FEATURES

- 4-in-1 Lumen/ Wattage Selectable power output from 100W/ 120W/ 150W/ 200W, to allow use in any application
- Design and high-quality materials providing very good environment and impact protection
- Dimmable using the 1-10v dimmable driver
- Suspended mounting or surface mounting using RSNB4-L accessory



RSNX50DA4-04	
Comparable to:	200-400W metal halide
Total Power (W):	94.6/118.7/147.1/195.0
Total Light Output (lm):	15,430/18,870/22,620/28,430
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	163/159/153/145
Lux at 1m (lux):	5,440/6,650/7,980/10,040
Emergency Lux at 1m (lux):	NA
CCT (K):	5,000
CRI:	85
IP:	65
Operation Temperature (°C):	-25 ≤ Ta ≤ +45
Inrush Current:	16A/112us
RG Value:	0
L70B50 or the variant:	>54,000
Dimensions (mm): ØxH	306x213
Weight (kg):	3.62

ACCESSORIES:

RSNB4-L Surface Mounting Bracket
 RDLHRV-HMW32S 1-10VDC MW DAYLIGHT HARVEST SENSOR

Dip switch on driver to change power

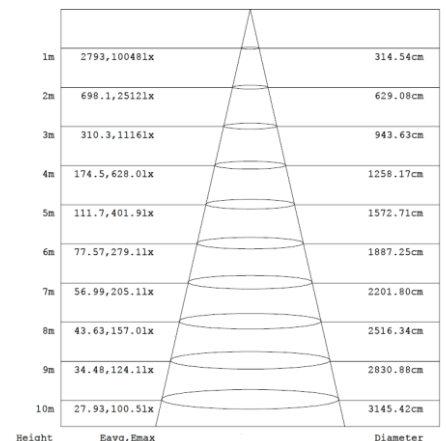


Diagram RSNX50DA4-04 in 200W. Other diagrams available on request

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA