

ROBUS®

DOWNLIGHTS

SLOGAN CCT Selectable LED Downlight

8W, IP44



PRODUCT INFORMATION DOCUMENT

FEATURES

- LED replacement for 50W halogen
- Complete with switch enabling selection between 3000K/4000K/5000K/6500K colour temperature
- Thermal Insulation rating of IC-4
- Prewired with 0.6m flex and AU plug
- Dimmable with selected leading and trailing edge dimmers (compatibility list available on the website)

CONSTRUCTION

- Low profile nylon housing and polycarbonate trim
- Polycarbonate diffuser
- Spring steel retaining springs



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



IP RATING



OPERATING VOLTAGE



BEAM ANGLE




DIMMING



CCT



SAFETY CLASS





IC RATING

	R8WDLCCCT4-01
Comparable to:	50W halogen
Total Power (W):	7.8/7.7/7.7/7.8
Total Light Output (lm):	740/800/800/780
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	96/105/105/101
IP:	44
Operation Temperature (°C):	-20 ≤ Ta ≤ +40
Lux at 1m (lux):	280/300/300/290
Emergency Lux at 1m (lux):	NA
Inrush Current:	3A/0.5us
CCT (K):	3000/4000/5000/6500
RG Value:	0
Rated Life to L70B50 (Hrs):	>54000
Dimensions ØxH (mm):	110x30
Cut Out (mm):	86
Weight (kg):	0.22

Product is certified to all the relevant standards.
Please contact our technical department for market specific compliance

ACCESSORIES:

R7TRIME-01	160mm Extension Trim
R7TRIMF-10	Matt Black Flush Trim
R7TRIMR-01	White Recessed Trim
R7TRIMR-10	Matt Black Recessed Trim

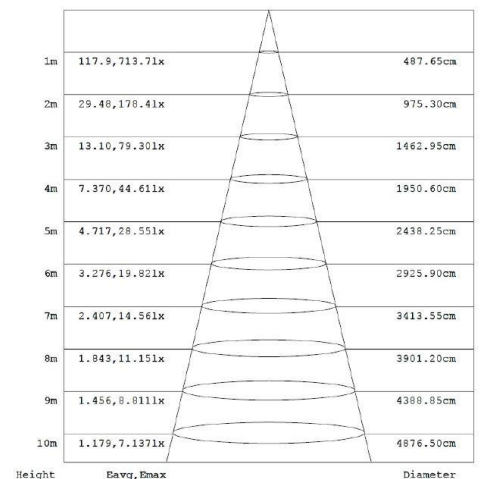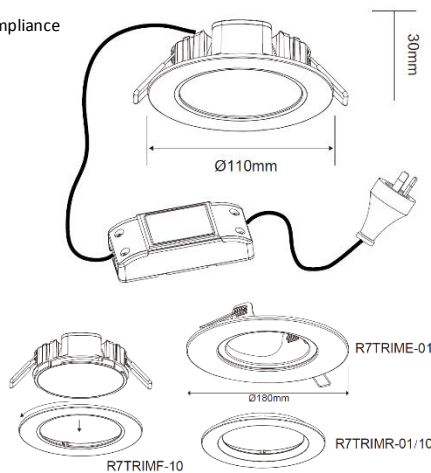

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Diagram for R8WDLCCCT4-01 in 4000K. Other diagrams available on request

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA