

# Catalogue No: CPRH-96-M400-G

## C/PREM PBOARD DIN-T 96W 400A MSW 7M-1512mm GREY

Power Distribution and Protection > Distribution Boards > Panelboards > CONCEPT PREMIER Panelboard > Concept Premier CPR Panelboard > Grey - Mild Steel



- Standard AS/NZS 61439
- Compact 160 A or 250 A main switch option
- 400A Isolator main switch option
- Isolator or circuit breaker main switch option
- IP66
- Modular sizes up to 96-Way
- 1.6 mm fully welded construction
- Stainless Steel option
- Accessory modules
- Removable gland plates
- Door fitted independent of escutcheon
- Removeable hinged escutcheon
- Right hand door hinging as standard
- Semi flush swing handle, lockable door
- 3 point locking
- Chassis tee-off isolator option

Representative Photo Only  
(actual product may vary based on configuration selections)

### SPECIFICATIONS

Product Series	Concept Premier
Component Type Power Distribution & Protection	Panelboard
Chassis Type	Encapsulated
IP Rating	IP66
IP rating, with door	IP66
IP rating, without door	IP30
Number of Poles	96
Number of Poles, 18mm Pitch	96 18mm Pitch
Number of Poles, 27mm Pitch	0 27mm Pitch
Box Size	7
Number of Modules	7 qty
Height	1512 mm
Depth, Including Door	240 mm, incl door
Depth, Door	20 mm depth
MCB Type	DIN Profile
Main Switch Type	VLB Isolator Main Switch
In, Rated Current, Main Switch	400 A
Product series, chassis	NC
In, rated current, busbar	400 A
Icw, Busbar Withstand Current, 100ms (rms)	30 kA for 100ms
Icw, Busbar Withstand Current, 300ms (rms)	25 kA for 300ms
Segregation Form Rating	1
Material	Powder Coated Mild Steel
Material Thickness	1.6 mm
Material, Base	Mild Steel
Material Thickness, Base	1.6 mm
Finish, Base	Powder Coated (Polyester) base
Colour, Base	Storm Grey (N42) base

# Catalogue No: CPRH-96-M400-G

## C/PREM PBOARD DIN-T 96W 400A MSW 7M-1512mm GREY

Power Distribution and Protection > Distribution Boards > Panelboards > CONCEPT PREMIER Panelboard > Concept Premier CPR Panelboard > Grey - Mild Steel



Material, door	Mild Steel
Material thickness, door	1.6 mm
Finish, Door	Powder Coated (Polyester) door
Colour, Door	Storm Grey (N42) door
Door Handle Type	Semi flush keyed CL001 quarter turn
Door hinged independent escutcheon	Yes, from RH side standard
Escutcheon	Bright white gloss hinged RH side
Material, Escutcheon	Mild Steel
Material Thickness, Escutcheon	1.2 mm
Finish, Escutcheon	Powder Coated (Polyester) escutcheon
Colour, Escutcheon	White escutcheon
Gland Plate/End Cap	Removable 2.0 mm mild steel, top/bottom
Spare DIN rail space (free poles)	18
Earth and Neutral bar Rating	400 A Dual Bars, 2 screw tunnel terminals (M10 studs top and bottom, spare 2 x M8 studs, 3 x M8 tunnels, 2 screw 16 mm tunnel terminals)
Ue, rated operational voltage, AC, 1ph, nom	240 V AC
Ue, rated operational voltage, AC, 3ph, nom	415 V AC
L99 Application	Concept Premier 7 module, grey panelboard, 96W DIN-T NC chassis and 400A main switch
Style of Panelboard	400 Amp Board
Standards Compliance	AS/NZS 61439.2


### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	<a href="#">Concept Gen 3 Installation Instruction Booklet</a>
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

# Catalogue No: CPRH-96-M400-G


## C/PREM PBOARD DIN-T 96W 400A MSW 7M-1512mm GREY

Power Distribution and Protection > Distribution Boards > Panelboards > CONCEPT PREMIER Panelboard > Concept Premier CPR Panelboard > Grey - Mild Steel

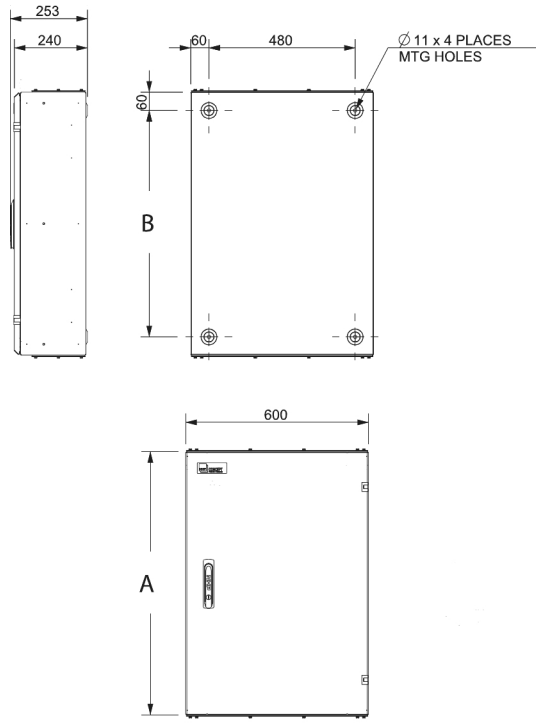

Module Size	A	B
2	432 mm	312 mm
3	648 mm	528 mm
4	864 mm	744 mm
5	1080 mm	960 mm
6	1296 mm	1176 mm
7	1512 mm	1392 mm
8	1728 mm	1608 mm
9	1944 mm	1824 mm

Plan view

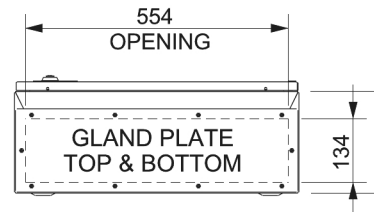

Dimension Diagram