


## FEATURES & BENEFITS


- UV resistant EDPM rubber
- Durable, lead free material
- Reinforced aluminium frame
- Designed to mould to multiple roof profiles
- Twin side-ports for additional cabling requirements (not on SEAL-5/55B)

## SPECIFICATIONS


Ozone resistance: ASTM D1149  
 Water resistance: ASTM D471  
 Tensile strength: 1598 psi  
 Tear strength: 205 ppi

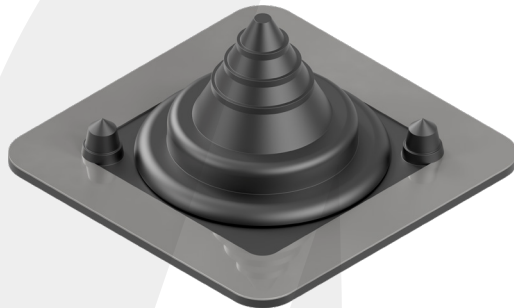

SEAL-0/35B

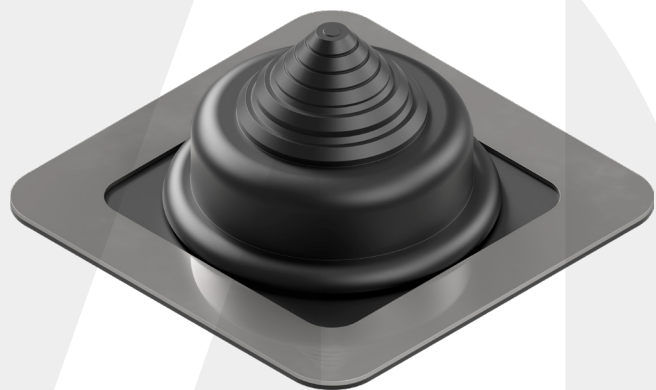

SEAL-5/55B

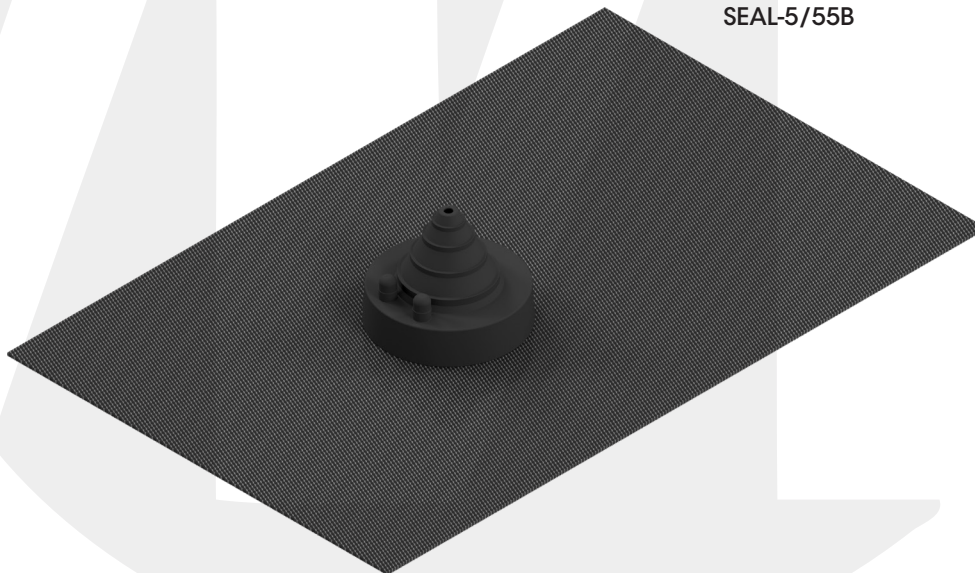

SEAL-5/50TILE

## ROOF PENETRATION SEAL RANGE

Code	Description	Penetration Size	Base Size	Packing	MOQ	Ctn
SEAL-0/35B	Roof Penetration Seal - Square	0-35mm	100x100mm	20	20	200
SEAL-5/55B	Roof Penetration Seal - Square	5-55mm	135x135mm	20	20	100
SEAL-5/50TILE	Roof Penetration Seal - Tile	5-50mm	280x450mm	1	1	25