

DA705CTD

Features

Triac dimmable
CCT selectable: 3000K, 4000K, 5000K
Polyamide body with latest heat dissipation technology
Opal acrylic diffuser for even lighting output
High efficiency SMD LED chips
CRI ≥ 80 and good stability over lifetime
With flex and plug
Quick and simple installation, use spring clip to fix on ceiling
IC-4 compliant
IP44 below ceiling, IP40 above
3-year warranty

Applications

Commercial building
Boutiques
Restaurants
Bedrooms
Offices / Meeting rooms

Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS 60598.2.2
IEC/AS/NZS CISPR 15

Mounting Methods



Recessed




Specifications

Model	DA705CTD
Nominal Power (W)	6
Input Voltage (V)	220-240
Frequency (Hz)	50/60
Luminaire Flux (lm)	610
Luminaire Efficacy (lm/W)	100
CRI (Ra)	≥ 80
Power Factor	> 0.9
SDCM	≤ 5
CCT (K)	3000/4000/5000
Beam Angle (°)	90
Luminaire Rated Life (hr)	30,000
Operating Temp. (°C)	-20 to +35
Weight (kg)	0.2

Packaging Details

Model	DA705CTD
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	105 x 97 x 66
Master Carton Qty per box (pc)	69
Master Carton Dimension (mm)	410 x 350 x 335

Lighting Data

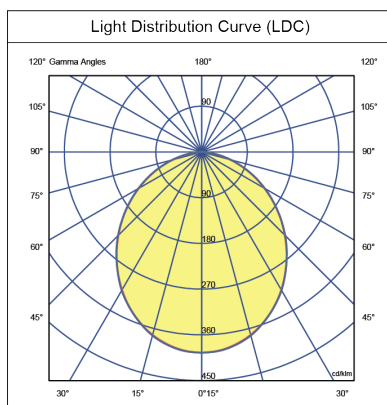

Dimensions

