



Recess




Surface

Operating Mode	Maintained
Nominal Input Voltage	230 - 240 V a.c. 50 Hz
Power Consumption	3 W
Inrush current	9.8 A peak
Battery	Li-ion 6.4 V 0.57 Ah
Light Source Life (LSL)	50,000 hrs
Operating Temperature	10° C to 40° C
Body construction	Polycarbonate
Diffuser Construction	Polycarbonate
IP Rating	IP20
IK Rating	IK03
Product Weight	1.2 kg
Compliance	AS/NZS 2293, AS/NZS 60598
Product Marking	

FEATURES

- Easy slide bracket.
- One box solution.
- Wall or Ceiling mount options.
- Recess trim included for recessed installations.
- iSmart™ temperature sensing technology for the Li-ion battery.
- Electronics designed to lengthen the life of the battery, minimising maintenance costs.
- Environment friendly battery.
- Designed in Australia.

DIMENSIONS

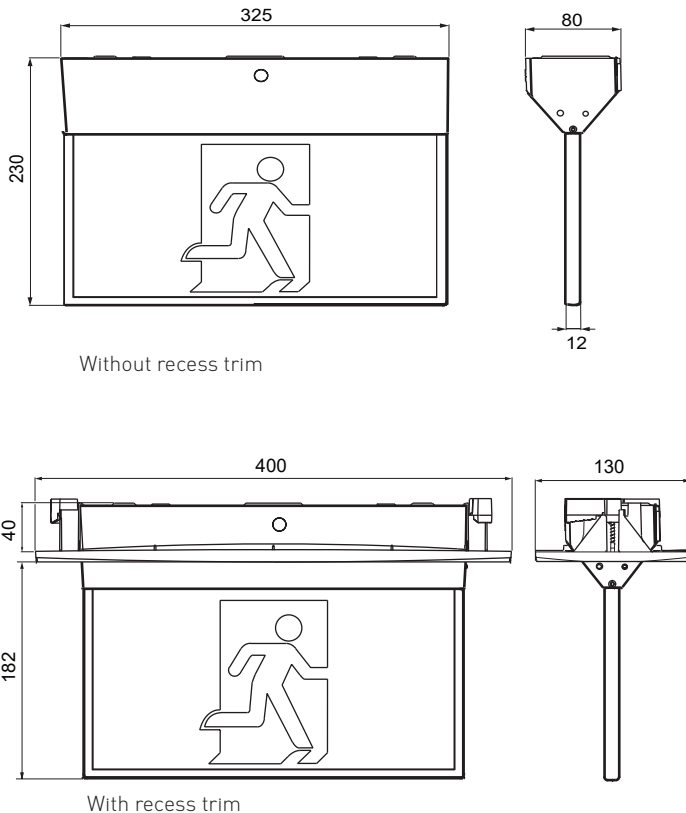

SPACING TABLE

Maximum Spacing between luminaires for 0.2 lux (Australia)					
Mounting Height (m)	2.7	3.0	3.3	3.6	4
C ₀ : B8	6.0	6.2	6.4	6.6	6.7
C ₉₀ : A20	6.8	7.2	7.5	7.8	8.2

As per AS/NZS 2293:2018

Maximum Spacing between luminaires for 1.0 lux (New Zealand)					
Mounting Height (m)	2.7	3.0	3.3	3.6	4
C ₀ : B8	3.0	0.0*	0.0*	0.0*	0.0*
C ₉₀ : A20	4.3	4.4	4.4	4.4	4.4

As per AS/NZS 2293:2018

* - exit sign satisfies the requirement to illuminate the doorway or potential hazard, however without a spacing for this mounting height as per AS/NZS 2293.1: 2018 clause 4.5.

Cat .No	Description
659624LI	Maintained LED set of 3 x RM Decals SS/DS - Li-ion
Accessories	
686216	Wire Suspension Kit (2 x 6 m)
686235	Wire Gaurd for Wall Mount Exit Signs
686236	Wire Gaurd for Ceiling Mount Exit Signs
686260	Suspension Rod Kit - 600 mm - White
686261	Suspension Rod Kit - 1200 mm - White
686262	Suspension Rod Kit - 3000 mm - White
686270	Weatherproof IP65 - Enclosure

RM= Running Man, DS= Double Sided, SS= Single sided

Note: All Dimensions are in mm.

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.